


# SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Contacts resistance : 20 m ohms max.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

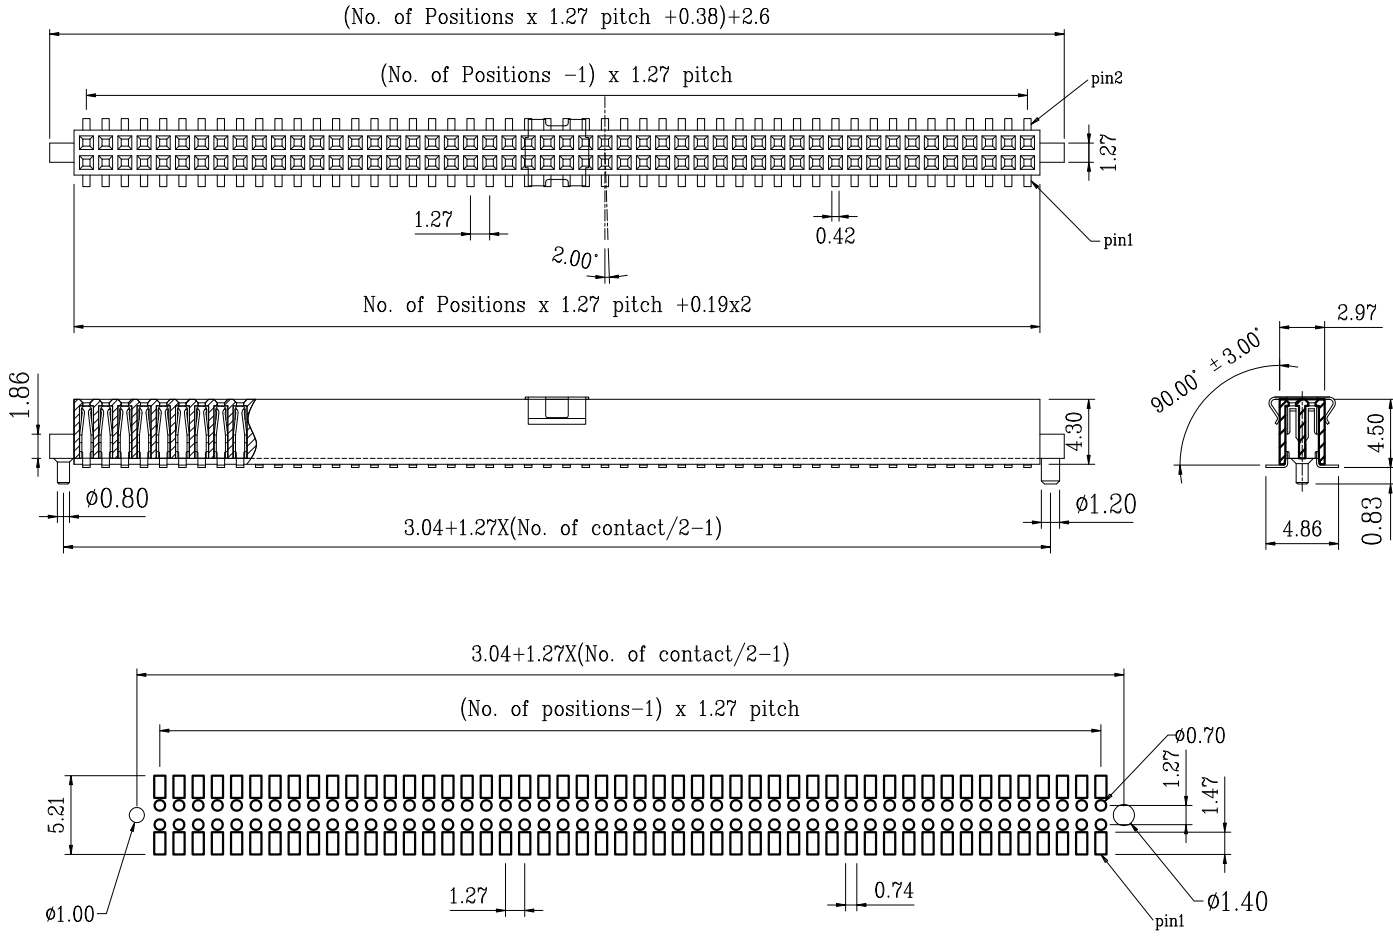

Recommended P.C.B. Layout

RoHS Compliant


TOLERANCES ARE



DRAWING BY CY		X. ± 0.20
CHECKED BY GENIUS		.X ± 0.15
UNIT / mm	SCALE 1 : 1	.XX ± 0.10
DATE		.XXX ± 0.05
		ANG ±



ORDER INFORMATION

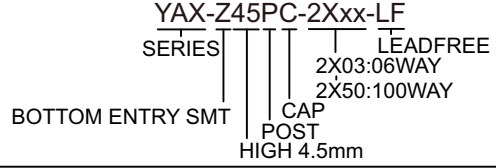

DESCRIPTION: Dual Row 1.27x1.27 SMD Female

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION