

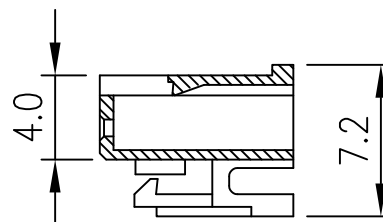
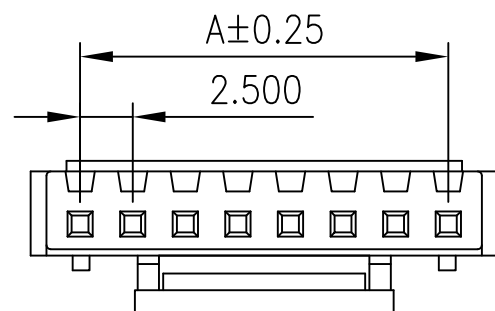


NOTES


Body: Nylon 66 UL 94-V0



Circuits	Dimension mm			
	A	B	C	D $\Delta 3$
2	2.50	5.70	2.10	7.30
3	5.00	8.20	3.40	9.80
4	7.50	10.70	3.40	12.30
5	10.00	13.20	4.45	14.80
6	12.50	15.70	4.45	17.30
7	15.00	18.20	6.55	19.80
8	17.50	20.70	6.55	22.30
9	20.00	23.20	7.25	24.80
10	22.50	25.70	7.25	27.30
11	25.00	28.20	29.80	16.95
12	27.50	30.70	32.30	16.95
13	30.00	33.20	34.80	16.95
14	32.50	35.70	37.30	17.25
15	35.00	38.20	39.80	19.75
16	37.50	40.70	42.30	19.75

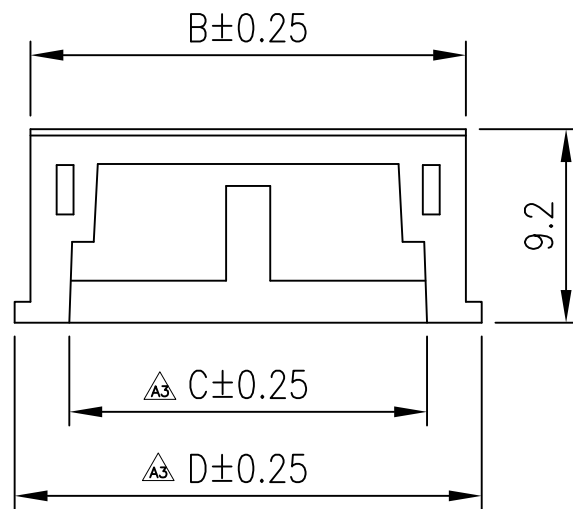

04~06P



02~03P

07~16P

$C \pm 0.25$

$C \pm 0.25$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG $\pm$

照片框

ORDER INFORMATION

YH25-H-xx-LF
SERIES | LEADFREE
02~16 WAY
HOUSING

DESCRIPTION: 2.5mm (.098") Pitch Housing With Lock Type