


Features:

- * Available in 2 through 15 circuits
- * Material: Insulator: Nylon 66 UL 94V-0 or PBT UL 94V-0
Contact: 0.64mm(.025") square pin, brass, tin plated

P.C.B LAYOUT

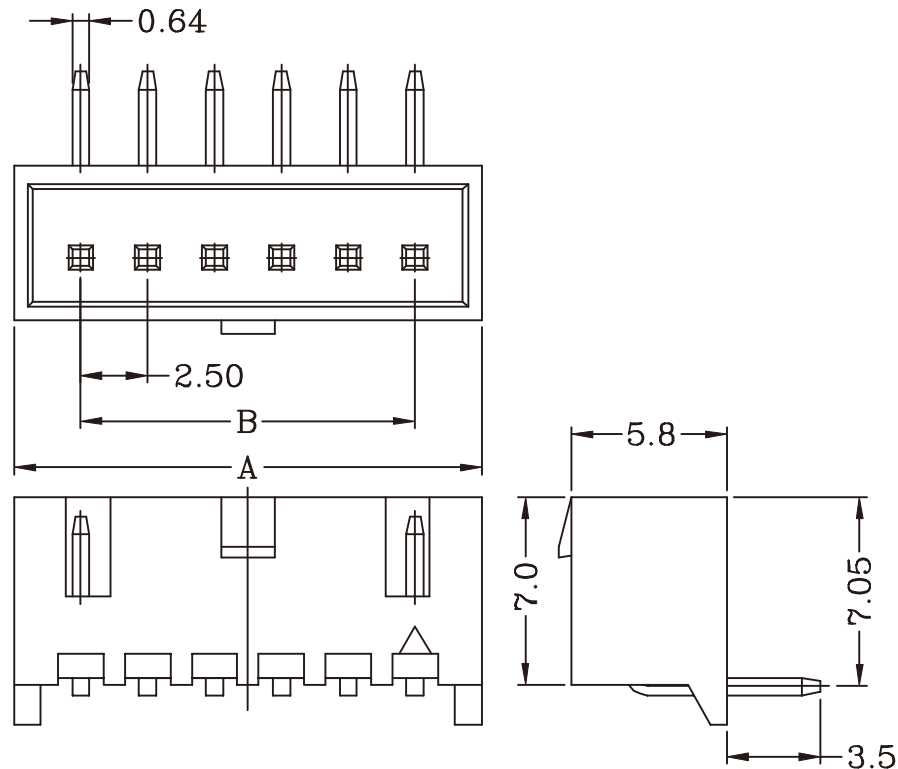

Circuits	Part No	Dimension mm		Qty/bag
	Right Angle	A	B	
2	YH25-R-02	7.48	2.50	1000
3	YH25-R-03	9.98	5.00	1000
4	YH25-R-04	12.48	7.50	1000
5	YH25-R-05	14.98	10.00	1000
6	YH25-R-06	17.48	12.50	1000
7	YH25-R-07	19.98	15.00	500
8	YH25-R-08	22.48	17.50	500
9	YH25-R-09	24.98	20.00	500
10	YH25-R-10	27.48	22.50	500
11	YH25-R-11	29.98	25.00	500
12	YH25-R-12	32.48	27.50	500
13	YH25-R-13	34.98	30.00	500
14	YH25-R-14	37.48	32.50	500
15	YH25-R-15	39.98	35.00	500

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

YH25-R-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 90°

DESCRIPTION: