

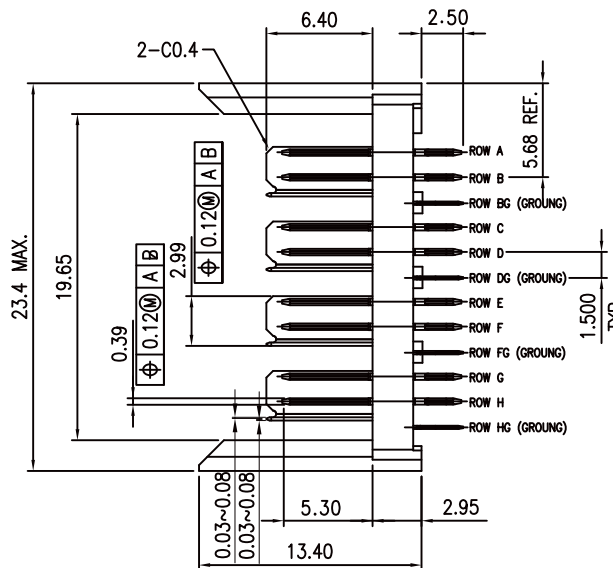
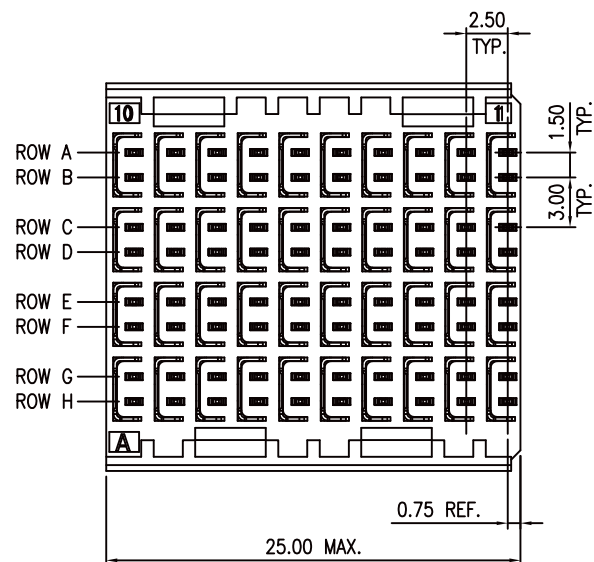


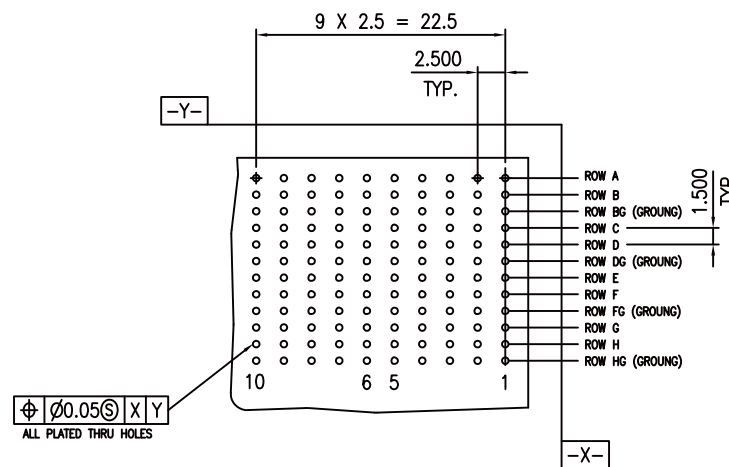

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
2. UNLESS OTHERWISE SPECIFIED, ALL RADIUS ARE 0.2 MM.
3. MATERIAL :
INSULATORL.C.P.+30% GLASS REINFORCED
CONTACTPHOSPHOR BRONZE C5191R-H
GROUND SHIELDPHOSPHOR BRONZE C5191R-H

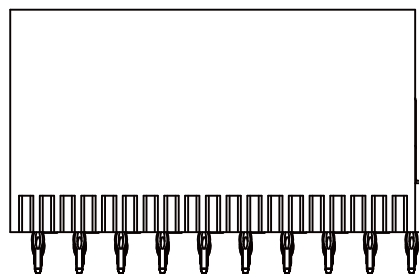

SCALE 2:1

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

ORDER INFORMATION



ZD-PP-4X10-LF
SERIES LEADFREE
40 WAY
PRESS FIT
MALE

DESCRIPTION: ZD MALE CONNECTOR ASSEMBLY , 4 PAIR 2.5mm TAIL

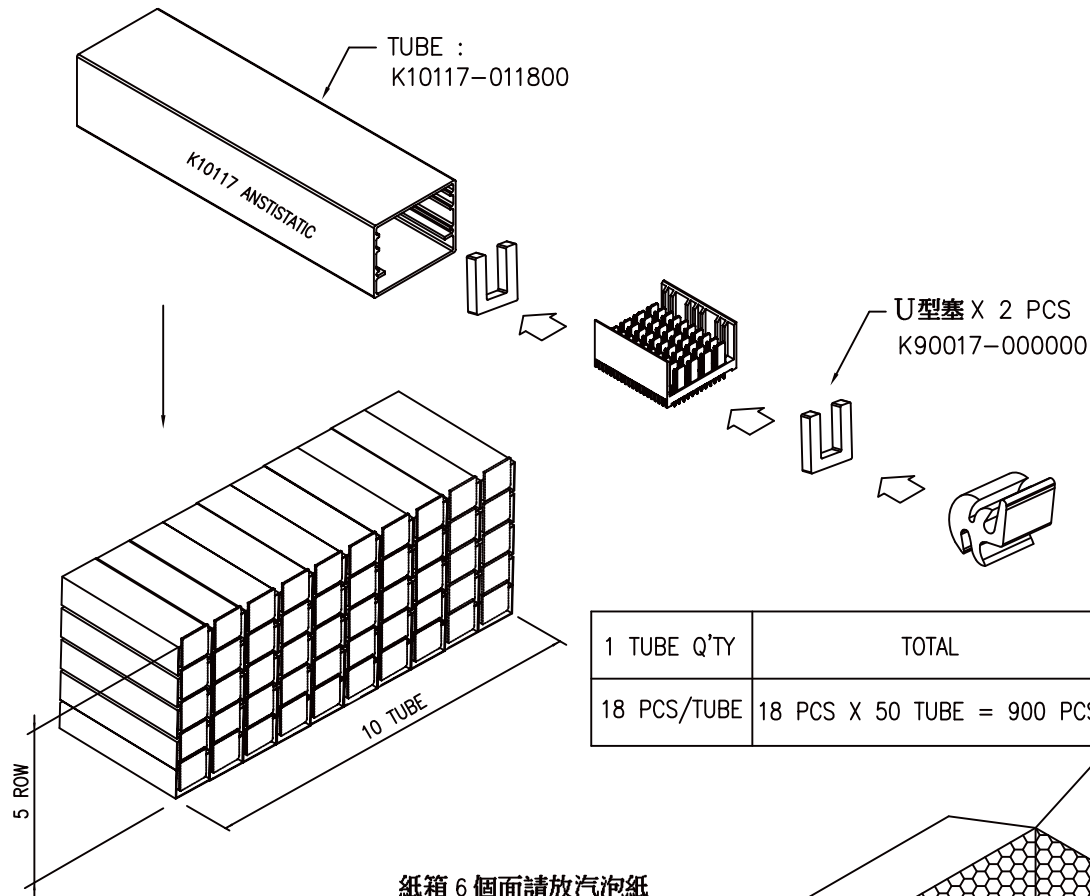

1 TUBE Q'TY	TOTAL
18 PCS/TUBE	18 PCS X 50 TUBE = 900 PCS

紙箱 6 個面請放汽泡紙
(K17007-710000: 50cmx20cm)
一箱用 12 PCS 汽泡紙

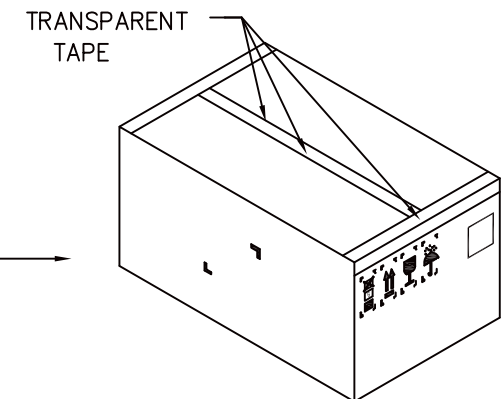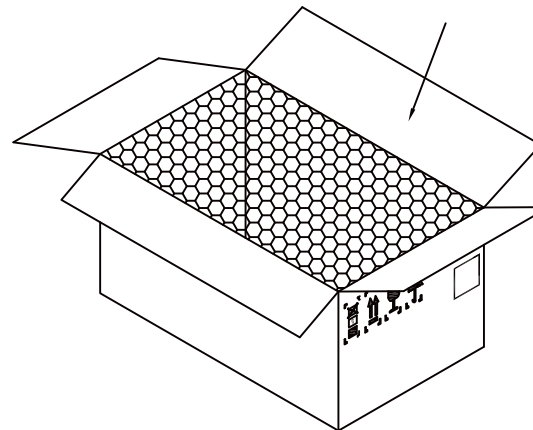

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

天

ORDER INFORMATION

≡'34;/)
6(5,(6 | | /(\$')5((
:.\$<
r35(66),7
0\$/((

DESCRIPTION: ZD MALE CONNECTOR ASSEMBLY , 4 PAIR 2.5mm TAIL