

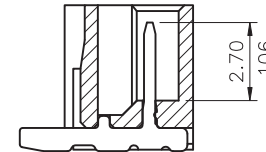
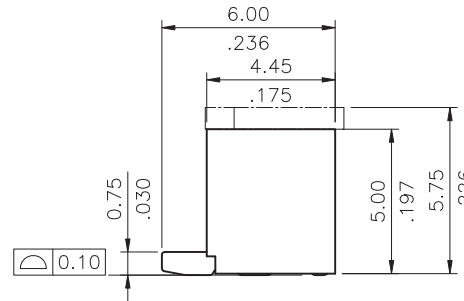


Material  
 Insulator: Halogen Free Plastic  
 UL 94V-0 Color Black  
 Contact: Copper alloy

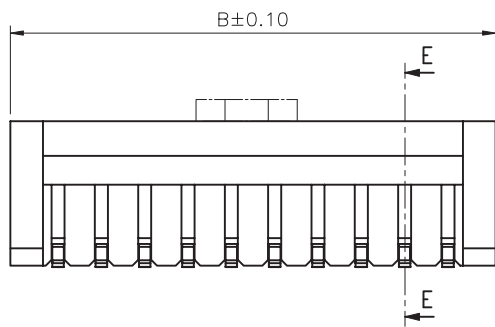

SEC.: E-E

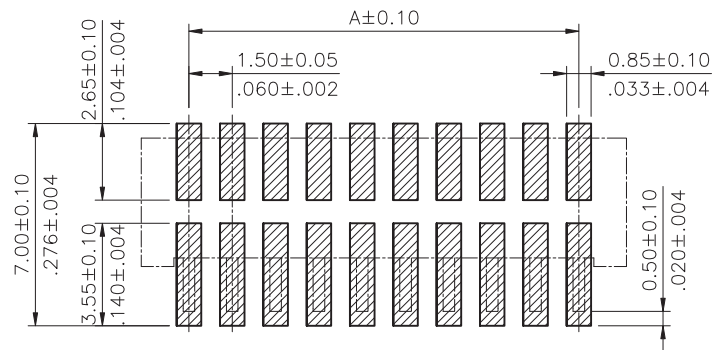

Recommended P.C. Board Layout

DIM. A = 1.50 x NO. OF SPACES

DIM. B = DIM. A + 3.3

DIM. C = DIM. A + 1.8

\* AVAILABLE IN 2 THROUGH 20 CIRCUITS

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

PJECTION

照片框

**ORDER INFORMATION**

ZHQ-VC-xx-LF  
 SERIES | LEADFREE  
 | 02-20WAY  
 | CAP  
 | 180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: