



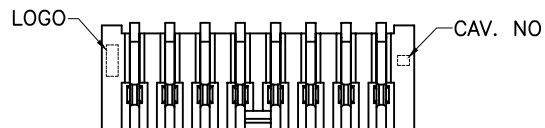
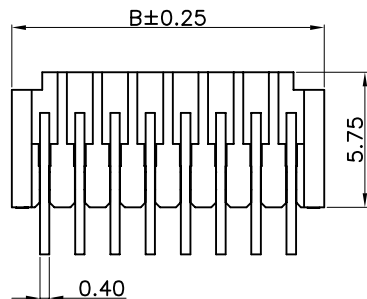


COLOR TABLE	
(VOID)	CREAM
C0	WHITE
C1	BLACK
C2	BROWN
C3	RED
C4	ORANGE
C5	YELLOW
C6	GREEN
C7	BLUE
C8	PURPLE
C9	GREY
CW	DARK RED

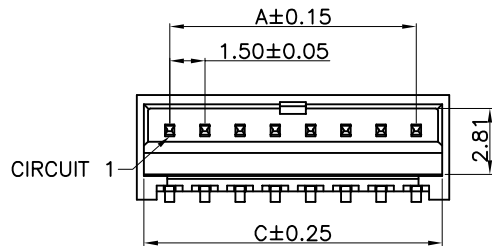

Mating Condition (REF.)

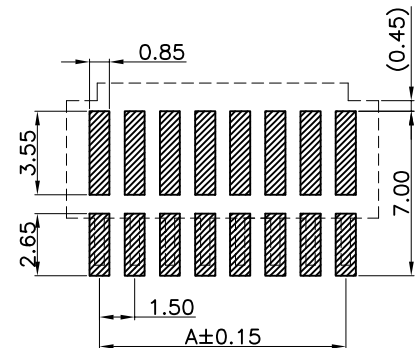

TOLERANCE: ±0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

PIN	DIM. (mm)			PIN	DIM. (mm)		
	A	B	C		A	B	C
02	-	4.30	3.70	11	15.00	17.80	17.20
03	3.00	5.80	5.20	12	16.50	19.30	18.70
04	4.50	7.30	6.70	13	18.00	20.80	20.20
05	6.00	8.80	8.20	14	19.50	22.30	21.70
06	7.50	10.30	9.70	15	21.00	23.80	23.20
07	9.00	11.80	11.20	16	22.50	25.30	24.70
08	10.50	13.30	12.70	17	24.00	26.80	26.30
09	12.00	14.80	14.20	18	25.50	28.30	27.70
10	13.50	16.30	15.70				

NOTES:

- MATERIAL:
INSULATION(STANDARD): NYLON 9T, UL94V-0; COLOR: SEE NOTE 4
INSULATION(HALOGEN FREE): NYLON 9T, UL94V-0; COLOR: SEE NOTE 4
CONTACT: COPPER ALLOY
- CONTACT FINISH: (VOID)--MATTE-TIN PLATED OVER NICKEL
GO--GOLD FLASH OVER NICKEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ± 3°

照片框

ORDER INFORMATION


ZHQ-WR-xx-LF
SERIES T T LEADFREE
02~18WAY
REEL
90°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 1.50mm, RIGHT ANGLE, SMT TYPE, ASSEMBLY

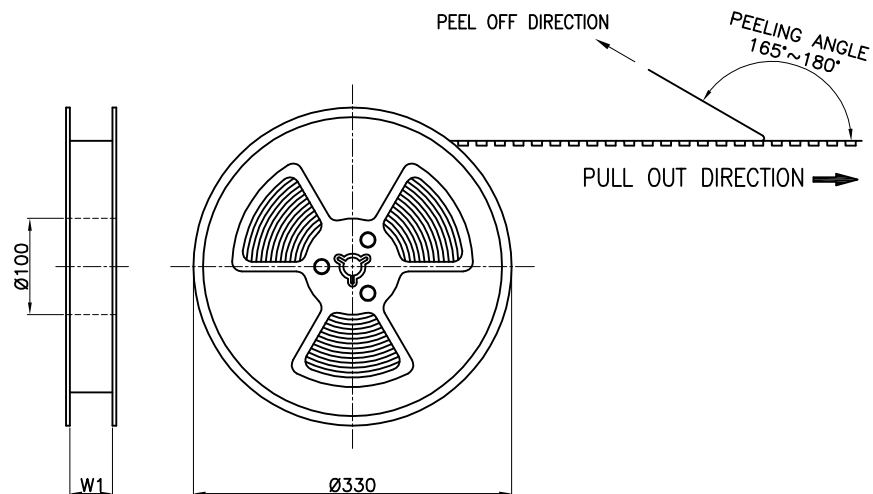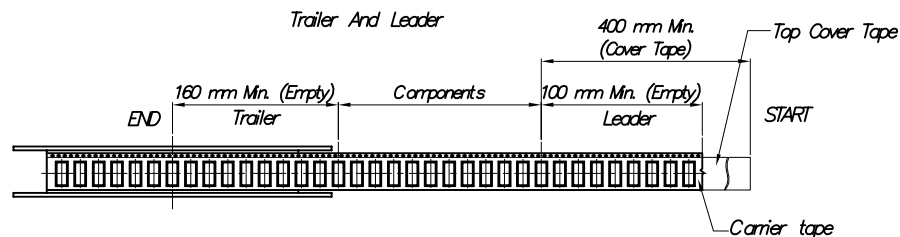

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. THE TOTAL TEARING CONTROL RANGE OF TOP COVER TAPE IS 10~130g, REFERENCE SPEC: EIA-481-D
4. PEELING SPEED: 300mm/MINUTES, REFERENCE SPEC: EIA-481-D
5. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
6. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS
7. THICKNESS : 0.35 ± 0.05 mm
8. COMPONENT LOAD PER 13" REEL : 800 PCS

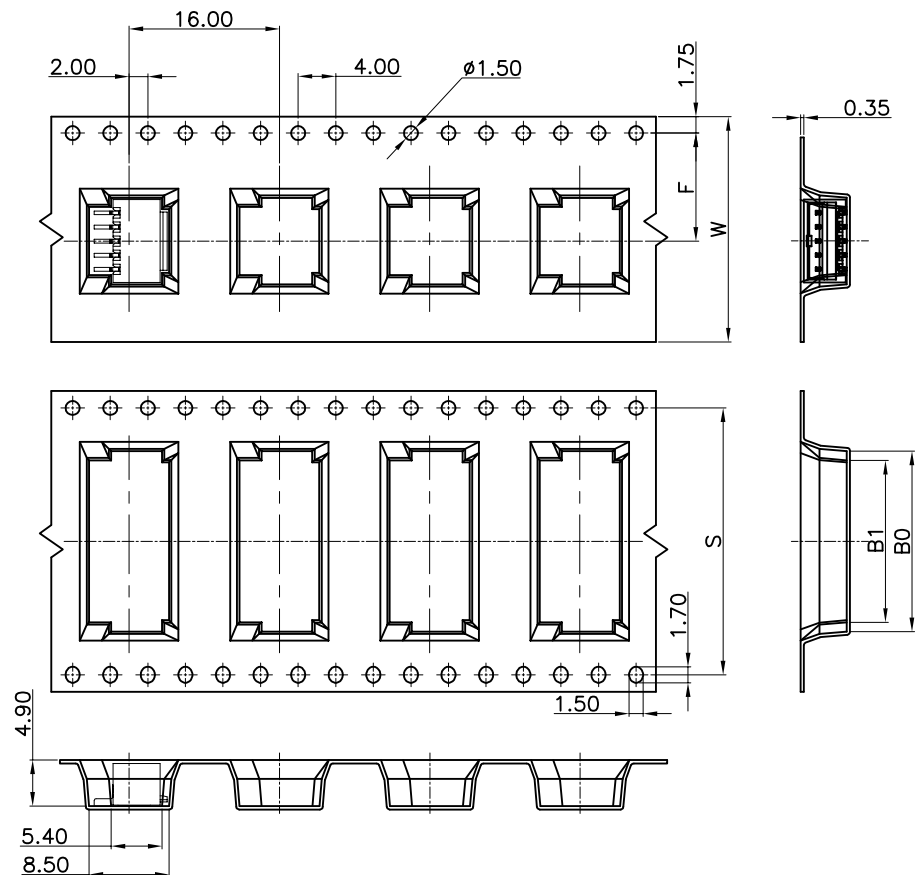

PIN	DIM. (mm)						PIN	DIM. (mm)					
	B0	B1	F	S	W	W1		B0	B1	F	S	W	W1
02	4.70	2.75	7.50		16.00	17.50	11	18.20	16.25	14.20	28.40	32.00	33.50
03	6.20	4.25	7.50		16.00	17.50	12	19.70	17.75	14.20	28.40	32.00	33.50
04	7.70	5.75	11.50		24.00	25.50	13	21.20	19.25	20.20	40.40	44.00	45.50
05	9.20	7.25	11.50		24.00	25.50	14	22.70	20.75	20.20	40.40	44.00	45.50
06	10.70	8.75	11.50		24.00	25.50	15	24.20	22.25	20.20	40.40	44.00	45.50
07	12.20	10.25	11.50		24.00	25.50	16	25.70	23.75	20.20	40.40	44.00	45.50
08	13.70	11.75	11.50		24.00	25.50	17	27.20	25.25	20.20	40.40	44.00	45.50
09	15.20	13.25	11.50		24.00	25.50	18	28.70	26.75	20.20	40.40	44.00	45.50
10	16.70	14.75	14.20	28.40	32.00	33.50							

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
X. ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION



照片框

ORDER INFORMATION

ZHQ-WR-xx-LF
SERIES T T LEADFREE
02~18WAY
REEL
90°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 1.50mm, RIGHT ANGLE, SMT TYPE, ASSEMBLY


PARTITION BOARD 2 PCS




PROTECT TAPE



INNER BAG




TRIANGLE BOARD 4 PCS

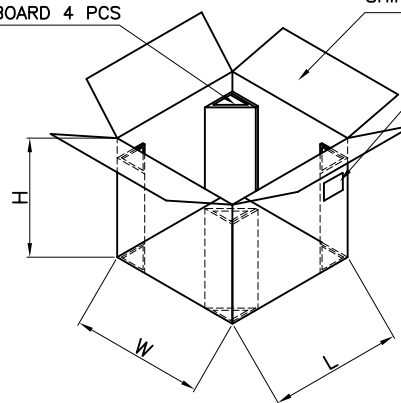

SHIPPING CARTON

TABEL



PACKING MATERIAL		PACKING CAPACITY			
PART NAME	DIM. (mm)	PIN	PCS/RE	RE/BC	PCS/BC
REEL	Ø330*(W+0.5)	02~03	800	12	9,600
CARTON	350*350*340	04~09	800	9	7,200
		10~12	800	7	5,600
		13~18	800	6	4,800

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ZHQ-WR-xx-LF
SERIES T T LEADFREE
02~18WAY
REEL
90°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 1.50mm, RIGHT ANGLE, SMT TYPE, ASSEMBLY