

Recommended P.C. Board SMD Layout

MATERIALS:
 INSULATOR: NYLON-6T, UL94V-0
 COLOUR: BLACK
 CONTACTS: BRASS, GOLD FLASH
 OVER NICKEL PLATED CONTACT AREAS,
 TIN PLATED SOLDER TAILS.

ELECTRICAL:
 CURRENT RATING: 1AMP.
 INSULATION RESISTANCE: 30MILLIONHMS MAX.
 DIELECTRIC WITHSTANDING: 500VAC
 OPERATING TEMPERATURE: -40°C~+105°C
 MAX. PROCESING TEMPERATURE: 230° FOR 30/60SEC.
 260° FOR 10SEC.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4


X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

YA-Z23P-2Xxx-LF

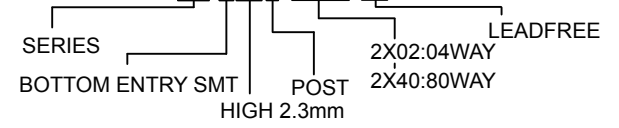

DESCRIPTION: