


RK Series Polarizing Housings

- * Material : Nylon UL 94V-2
- * Current rating : 1A, AC/DC
- * Voltage rating : 250V, AC/DC
- * Molded friction lock
- * Optional polarization or locking ramp
- * 2-20 circuits available

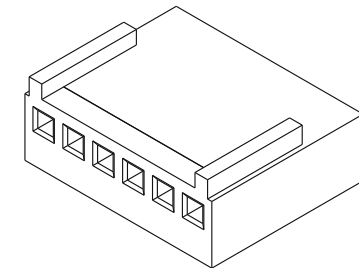

Dimensional information-inch/mm

Circuits	Dim. A		Dim. B		Circuits	Dim. A		Dim. B	
	inch	mm	inch	mm		inch	mm	inch	mm
2	0.098	2.50	0.220	5.60	12	1.083	27.50	1.205	30.60
3	0.197	5.00	0.319	8.10	13	1.181	30.00	1.303	33.10
4	0.295	7.50	0.417	10.60	14	1.280	32.50	1.402	35.60
5	0.394	10.00	0.516	13.10	15	1.378	35.00	1.500	38.10
6	0.492	12.50	0.614	15.60	16	1.476	37.50	1.598	40.60
7	0.591	15.00	0.713	18.10	17	1.575	40.00	1.697	43.10
8	0.689	17.50	0.811	20.60	18	1.673	42.50	1.795	45.60
9	0.787	20.00	0.909	23.10	19	1.772	45.00	1.894	48.10
10	0.886	22.50	1.008	25.60	20	1.870	47.50	1.992	50.60
11	0.984	25.00	1.106	28.10					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION



ORDER INFORMATION

RK-H-xx-LF
SERIES | LEADFREE
| 02-20WAY
HOUSING

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com