

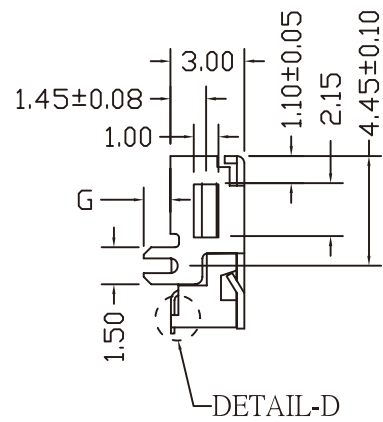
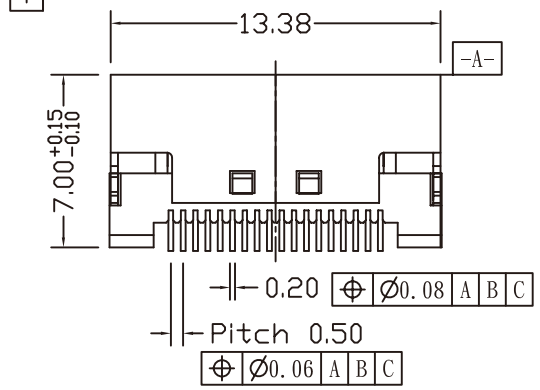


- NOTES:
- ELECTRICAL
CURRENT RATING:0.5A
DIELECTRIC WITHSTANDING VOLTAGE:300VAC
INSULATION RESISTANCE:100MΩ /1000VDC
CONTACT RESISTANCE:80mΩ
 - ENVIRONMENTAL
OPERATING TEMPERATURE:-10°C TO 60°C
STORAGE TEMPERATURE:-30°C TO 60°C

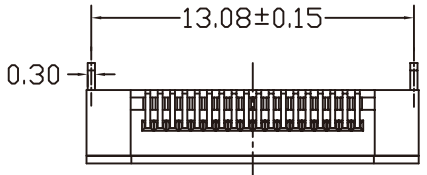

NOTE:

G	1	0.70±0.05
	2	0.90±0.05

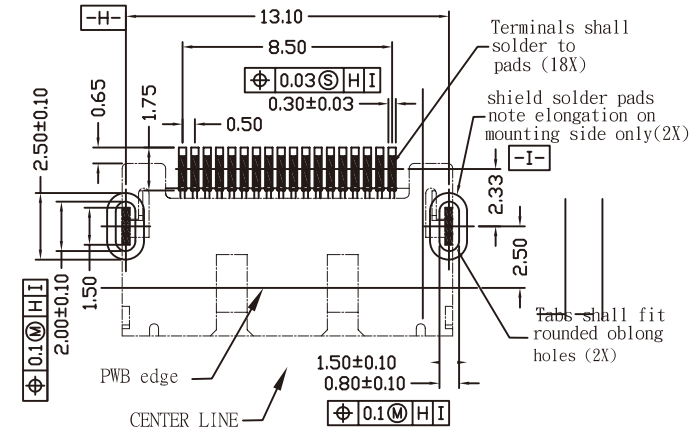


RoHS Compliant

TOLERANCES ARE



DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

CPSAM-JW-18-LF
SERIES | LEADFREE
18 WAY
90°SMT
JACK

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: