


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ILS-D-02	2.00	6.00
ILS-D-03	4.00	8.00
ILS-D-04	6.00	10.00
ILS-D-05	8.00	12.00
ILS-D-06	10.00	14.00
ILS-D-07	12.00	16.00
ILS-D-08	14.00	18.00
ILS-D-09	16.00	20.00
ILS-D-10	18.00	22.00
ILS-D-11	20.00	24.00
ILS-D-12	22.00	26.00
ILS-D-13	24.00	28.00
ILS-D-14	26.00	30.00
ILS-D-15	28.00	32.00

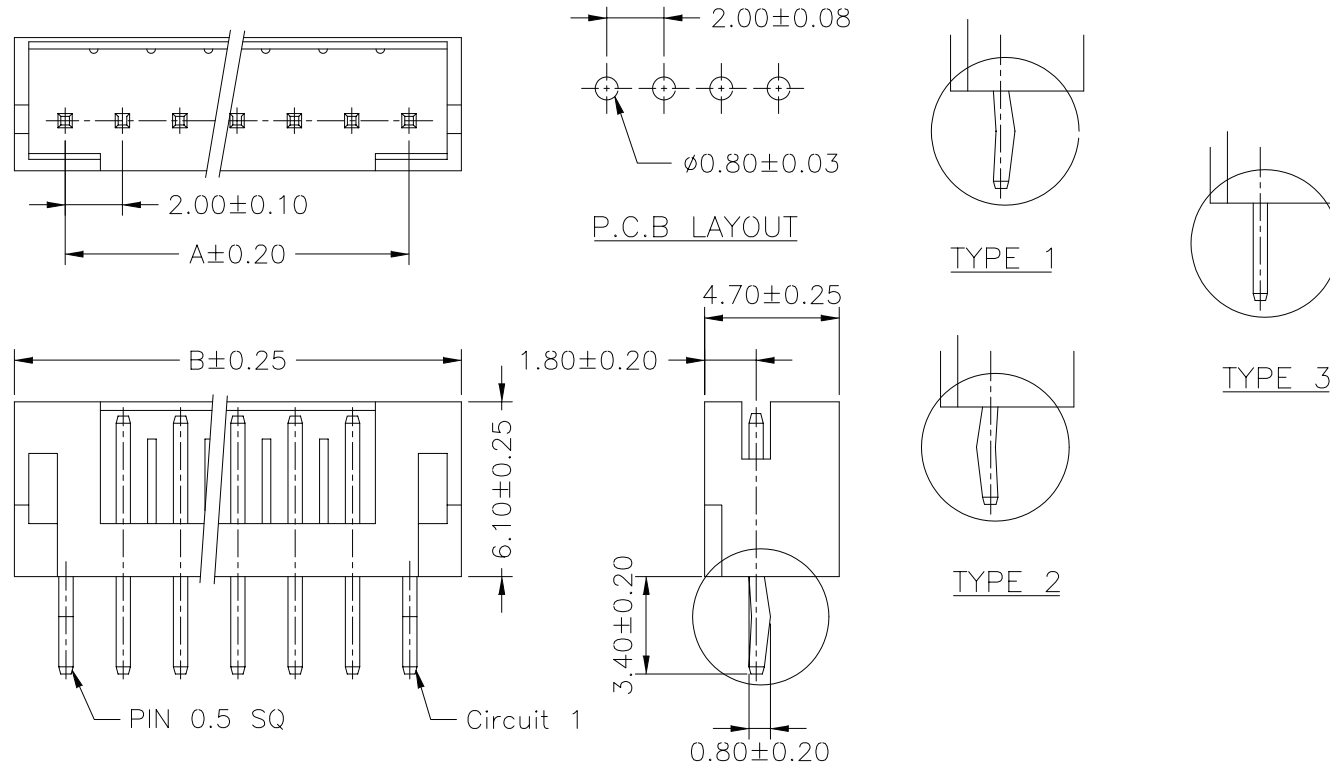

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION



DESCRIPTION: 2.00mm PITCH 180° WAFER