

NOTE:

1.MATERIAL:




- 1.1 HOUSING: HIGH THERMOPLASTIC ,UL 94V-0 COLOR: BLACK.
- 1.2 CONTACT: 5191R-H,T=0.15±0.01;
- 1.3 SHELL: C2680R-H,T=0.15±0.01;

2.FINISH: 2.1 CONTACT: GOLD OVER NICKEL

- 2.2 SHELL: NICKEL OVER ALL OVER,
G/F OVER SOLDER AREA;

3.RATING: OPERATING VOLTAGE: 30V

- CURRENT RATING: 0.5A
- OPERATING TEMPERATURE: -20°C~+85°C

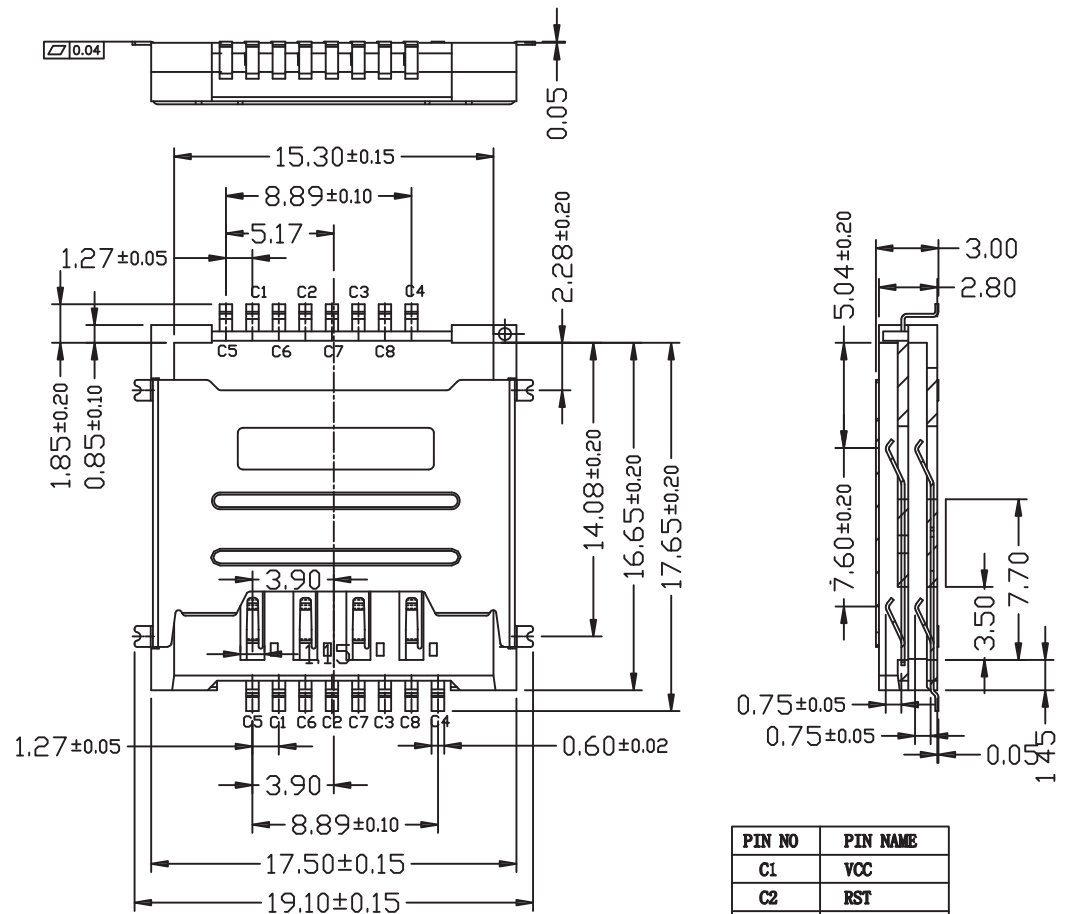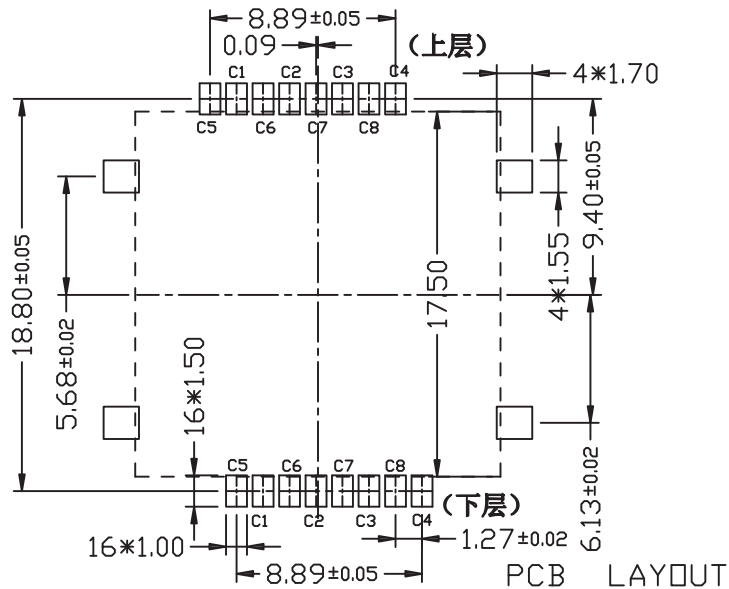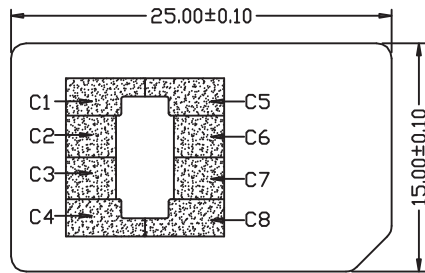

PIN NO	PIN NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±
X ± 0.10
.XX ± 0.05
.XXX ±
ANG ±



ORDER INFORMATION

SCTB1-WE-08-LF

SERIES

EAR
90°SMT

08WAY

LEADFREE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: