






(14P~50P)

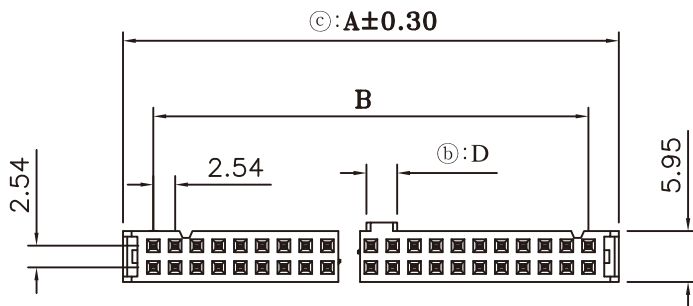

MATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
 CONTACT MATERIAL:BRASS
 GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:3000MΩ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:500V AC
 OPERATING TEMPERATURE:-40°C~+105°C
 TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE.




Table-1

DIMENSION				
CONTACT	A	B	C	D
⑥: 06P	12.18	05.08	13.35	1.90
⑥: 08P	14.72	07.62	13.35	1.90
10P	17.26	10.16	13.35	3.60
12P	19.80	12.70	13.35	3.60
14P	22.34	15.24	13.35	3.60
16P	24.88	17.78	13.35	3.60
18P	27.42	20.32	13.55	3.60
20P	29.96	22.86	13.35	3.60
24P	35.04	27.94	13.35	3.60
26P	37.58	30.48	13.35	3.60
30P	42.66	35.56	13.35	3.60
34P	47.74	40.64	13.35	3.60
40P	55.36	48.26	13.35	3.60
50P	68.06	60.96	13.35	3.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

F-C3GE-xx-LF
 SERIES | LEADFREE
 | 06-50WAY
 | GRAY
 | THREE TYPE

DESCRIPTION: