

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20mΩ Max.



Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

NYLON-6T

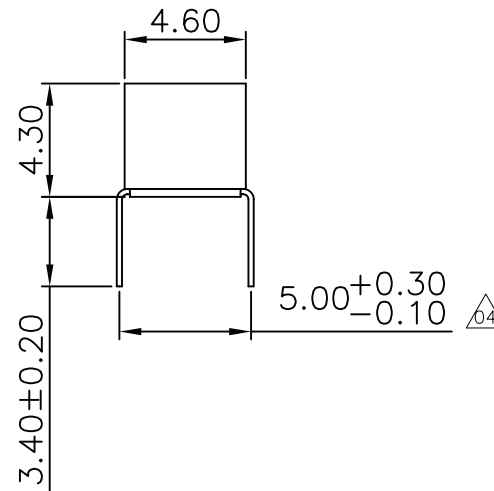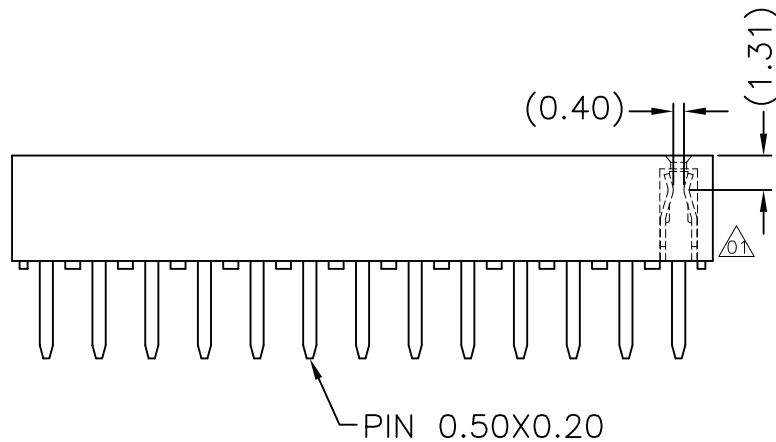

Recommended P.C.Board
Hole Layout $\Delta 2$

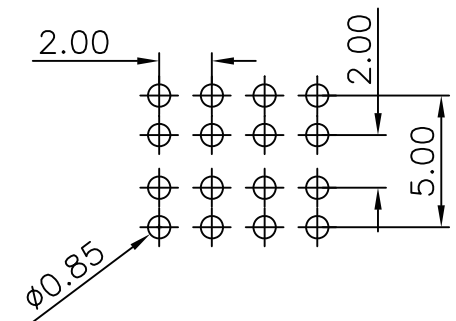

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION \ominus \triangleleft



ORDER INFORMATION

S-B50-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X40:80WAY

BOTTOM ENTRY 5.0mm

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS DIP TYPE BASE 4.30H