
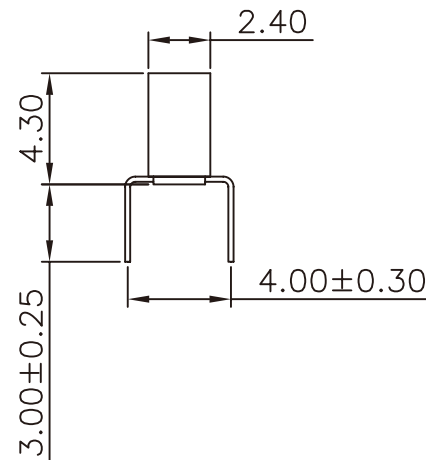
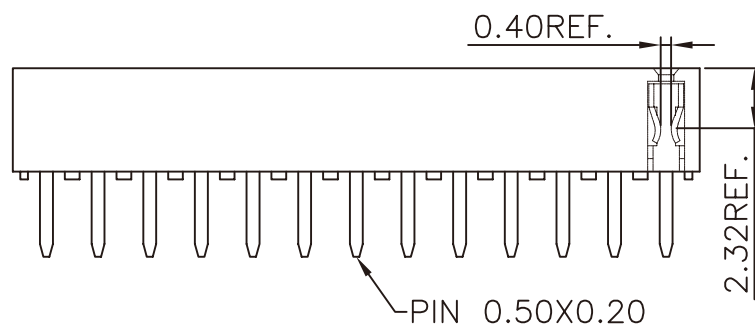


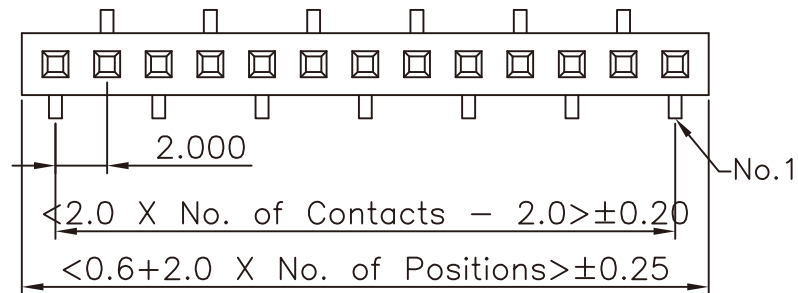

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
Nylon 6T

Recommended P.C.Board

Hole Layout

(Tolerance: ±0.05)

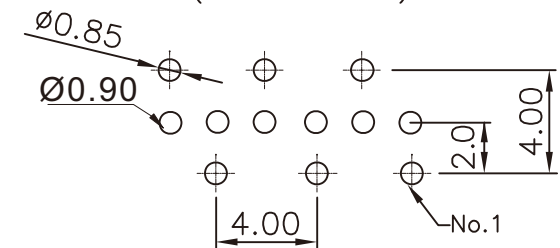

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±



ORDER INFORMATION

S-B40-1XxxR-LF
SERIES | LEADFREE
R TYPE FOOT POSITION
1X02:02WAY
1X40:40WAY
BOTTOM ENTRY 4.0mm

DESCRIPTION: 2.00 FEMALE HEADER SINGLE ROW DIP TYPE BASE 4.30H