

SPECIFICATIONS

- ① Housing Material: Polyamide 66(UL94V-0), Green
- ② Screw: M2.0 Yellow Zinc Plated Steel
- ③ Cage Clamp: Tin Plated Brass
- ④ Terminals: Tin Plated Brass

Screws Torque: 1 In-Lb





Wire Range: 16~24 AWG

Rated: 10 Amperes.AC300V

Operation Temperature: -55°C~+115°C

Insulation withstands volt: AC2000V min

Insulation resistance: >1000MΩ or more at DC500V

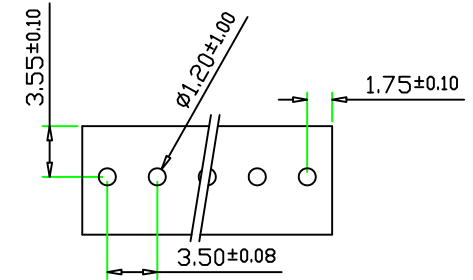

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12				
A	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42				
B	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5				
POLE	13	14	15	16	17	18	19	20	21	22	23	24	25	26	
A	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	91	
B	42	45.5	49	52.5	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBH035-D08-xx-LF

SERIES | LEADFREE
02-26 AWG
HIGH 8.6mm
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: