

**MATERIALS**

1. HOUSING : PBT+25%
2. TERMINAL : BRASS, GOLD/TIN PLATED
3. FRONT SHIELD : SPCC, NICKEL PLATED
4. BACK SHIELD : SPCC, TIN PLATED

**SPECIFICATION:**

1. CURRENT RATING: 1.5AMP. MAX
2. DIELECTRIC WITHSTANDING VOLTAGE: AC 500Vmin R.M.S.
3. INSULATION RESISTANCE: 1000MV MIN. AT 500V DC
4. CONTACT RESISTANCE: 20mV MAX
5. OPERATING TEMPERATURE: 0°C TO +85°C
6. MAX. PROCESSING TEMPERATURE:  
230°C FOR 30~60 SECONDS (HI.-TEMP. PLASTIC)

PART NO.	PLATING	COLOR
DVI-PS-24+1	GOLD(3u') OR TIN PLATED	WHITE

**NOTE:**

THE 14PIN HIGHEST SHORT 0.76m/m OTHER PIN

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

P PROJECTION

X, ±  
.X ± 0.20  
.XX ± 0.10  
.XXX ±  
ANG ±



**ORDER INFORMATION**

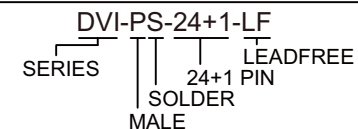

DESCRIPTION: DVI 24+1公半金白膠