


Note:

1. Material:

- 1.1 Insulator: High temperature thermoplastic with g.f, UL94v-0
- 1.2 Contact: Copper alloy, $t=0.25\text{mm}$
- 1.3 Shell: Spcc, $t=0.30\text{mm}$
- 1.4 Clip: Stainless steel, $t=0.30\text{mm}$

2. Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: $-55^{\circ}\text{C} \sim 85^{\circ}\text{C}$

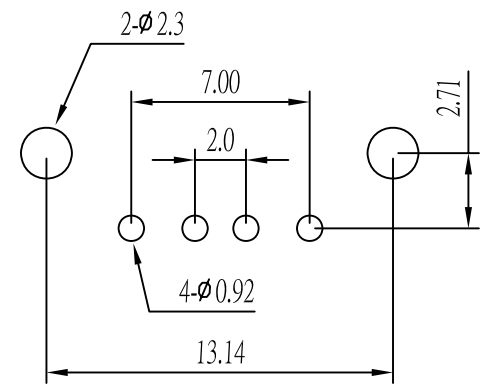

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PJECTION



ORDER INFORMATION

USB-SDWH-4A-LF

SERIES | LEADFREE
WHITE | 4 PIN A TYPE
DIP 180° | FEMALE

DESCRIPTION: USB-A TYPE P.C.B(F)180°