





UNC #4-40 Hexscrew



HGCF 15M/F GENDER CHANGER

PIN OUT: 15Male

15Female

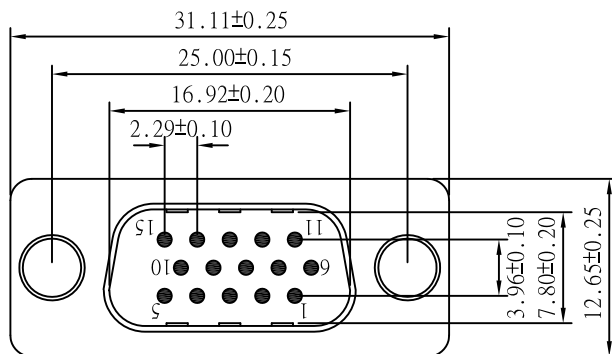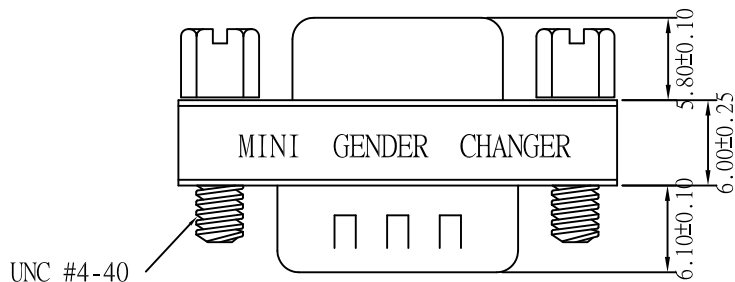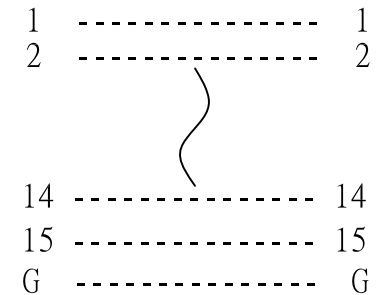

ELECTRICAL TEST:

1. 100% Test (Open, short, miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 20M ohm min.
4. Hi-pot: 300V DC/0.5mA

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION



ORDER INFORMATION

HDX2-ES-1515-LF

SERIES | LEADFREE
15 MALE / 15 FEMALE
SLIM
MALE TO FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: