

FEATURES AND SPECIFICATIONS

Features and Benefits



Size 2 to 20 circuits

Electrical


Current Rating: 3A AC, DC
 Voltage Rating: 250V AC/ max.
 Insulation Resistance: 1000M Ω / min.
 Dielectric Withstanding Voltage: 1500V AC/ min.
 Contact Resistance: 10m Ω / max.
 Operating Temp.: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C

Physical

Material: Nylon 66, UL94V-2
 Terminal Material: Brass/ Tin-plated/ Gold-plated

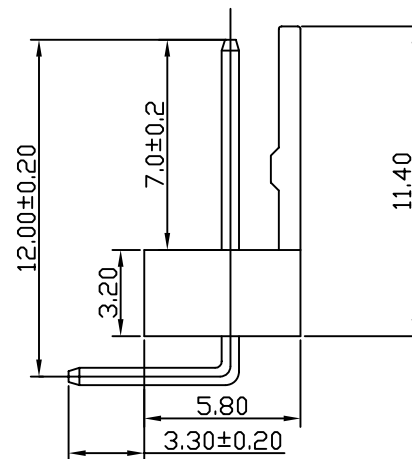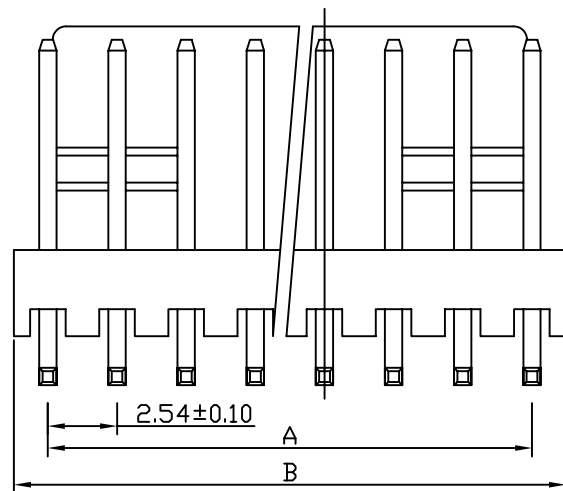

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	2.54(0.100)	5.12(0.202)	MK-RV-02	
3	5.08(0.200)	7.66(0.302)	MK-RV-03	
4	7.62(0.300)	10.20(0.402)	MK-RV-04	
5	10.16(0.400)	12.74(0.502)	MK-RV-05	
6	12.70(0.500)	15.30(0.602)	MK-RV-06	
7	15.24(0.600)	17.94(0.706)	MK-RV-07	
8	17.78(0.700)	20.48(0.806)	MK-RV-08	
9	20.32(0.800)	23.02(0.906)	MK-RV-09	
10	22.86(0.900)	25.58(1.007)	MK-RV-10	
11	25.40(1.000)	28.12(1.107)	MK-RV-11	
12	27.94(1.100)	30.68(1.208)	MK-RV-12	
13	30.48(1.200)	33.10(1.303)	MK-RV-13	
14	33.02(1.300)	35.80(1.409)	MK-RV-14	
15	35.56(1.400)	38.34(1.509)	MK-RV-15	
16	38.10(1.500)	40.94(1.612)	MK-RV-16	
17	40.64(1.600)	43.30(1.705)	MK-RV-17	
18	43.18(1.700)	45.90(1.807)	MK-RV-18	
20	48.26(1.900)	50.80(2.000)	MK-RV-20	

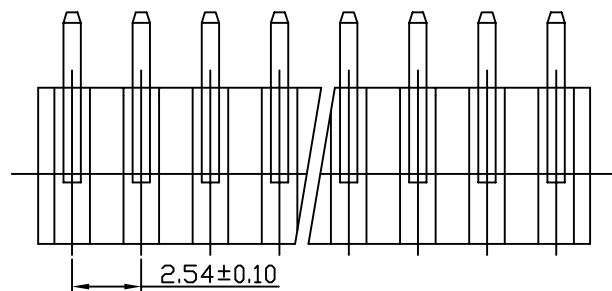

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE


SIZE A4

PJECTION

X, \pm
 .X \pm 0.35
 .XX \pm 0.25
 .XXX \pm
 ANG \pm

煜倫股份有限公司

www.morethanall.com



ORDER INFORMATION

MK-RV-xx-LF
 SERIES | LEADFREE
 | 02~20WAY
 | REVERSED
 | DIP 90 $^{\circ}$

DESCRIPTION: 2.54mm Wire-to-Board Header DIP 90 $^{\circ}$ Type (彎反向)