


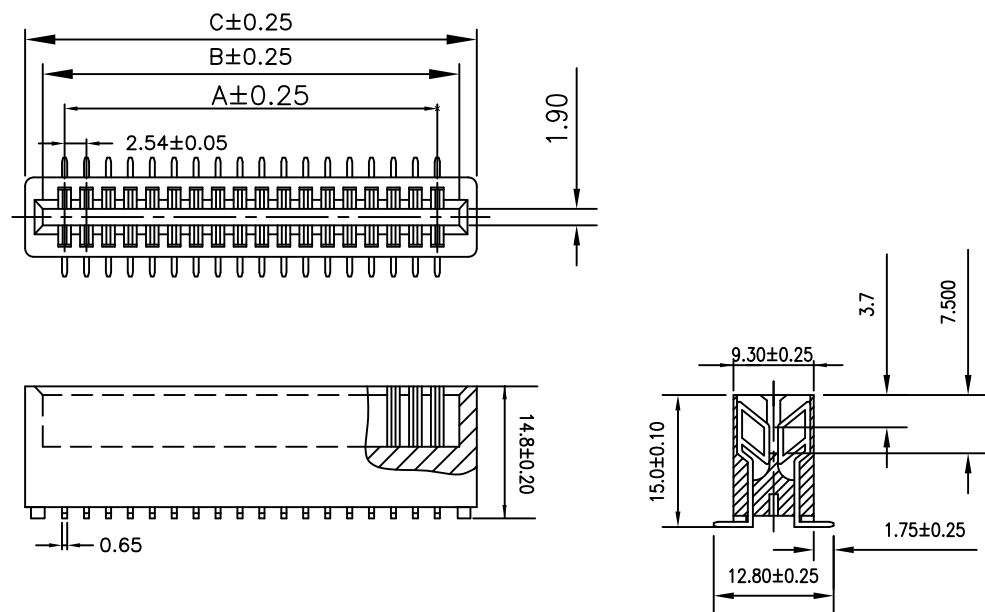

DIMENSIONS


Circuits	A	B	C	Circuits	A	B	C
6	5.08	10.66	14.22	48	58.42	64.00	67.56
8	7.62	13.20	16.76	50	60.96	66.54	70.10
10	10.16	15.74	19.30	52	63.50	69.08	72.64
12	12.70	18.28	21.84	54	66.04	71.62	75.18
14	15.24	20.82	24.38	56	68.58	74.16	77.72
16	17.78	23.36	26.92	58	71.12	76.70	80.26
18	20.32	25.90	29.46	60	73.66	79.24	82.80
20	22.86	28.44	32.00	62	76.20	81.78	85.34
22	25.40	30.98	34.54	64	78.74	84.32	87.88
24	27.94	33.52	37.08	66	81.28	86.86	90.42
26	30.48	36.06	39.62	68	83.82	89.40	92.96
28	33.02	38.60	42.16	70	86.36	91.94	95.50
30	35.56	41.14	44.70	72	88.90	94.48	98.04
32	38.10	43.68	47.24	100	124.46	130.04	133.69
34	40.64	46.22	49.78				
36	43.18	48.76	52.32				
38	45.72	51.30	54.86				
40	48.26	53.84	57.40				
42	50.80	56.38	59.94				
44	53.34	58.92	62.48				
46	55.88	61.46	65.02				

MATERIAL

- Insulator: Glass-Fiber 9T(UL94V-0)
- Contact: Brass (B)
- Plating: MATING AREA- G/F GOLD OVER NICKEL.
SOLDER AREA- TIN OVER NICKEL.

SPECIFICATIONS

- Insulation Resistance: 5000 Ω min at 500 VDC
- Dielectric Withstanding Volatge: 1000 V-AC/1 min
- Current Rating: 3A
- Contact Resistance: 20m Ω max
- Operating Temperature: -55 $^{\circ}$ C to 85 $^{\circ}$ C
- Insartion Force: 340g max per pair
- Withdrawal Force: 28g min per pair

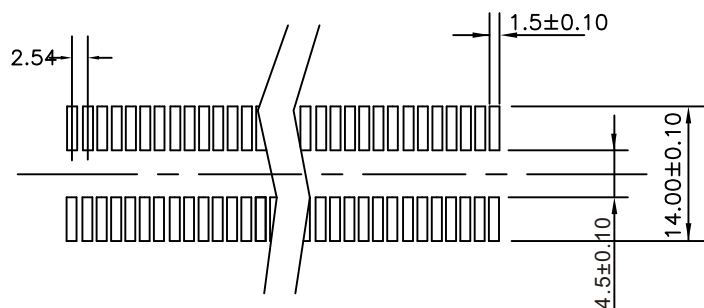

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

GE-VX-xxx-LF
SERIES LEADFREE
006~100 WAY
NON POST
180 $^{\circ}$ SMT

DESCRIPTION: