
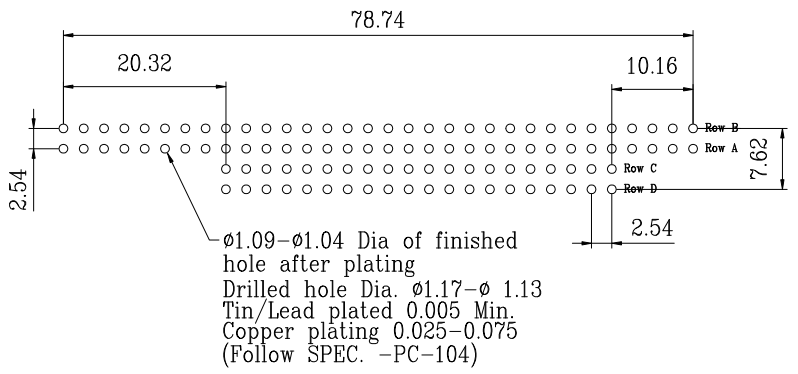


SPECIFICATIONS  
 CURRENT RATING: 3 AMPS  
 INSULATOR RESISTANCE: 5000 MEGPHMS MIN.  
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING: AC 500V  
 OPERATING TEMPERATURE: -25°C ~ +85°C


MATERIAL  
 CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)  
 INSULATOR: PA-9T, UL 94V-0

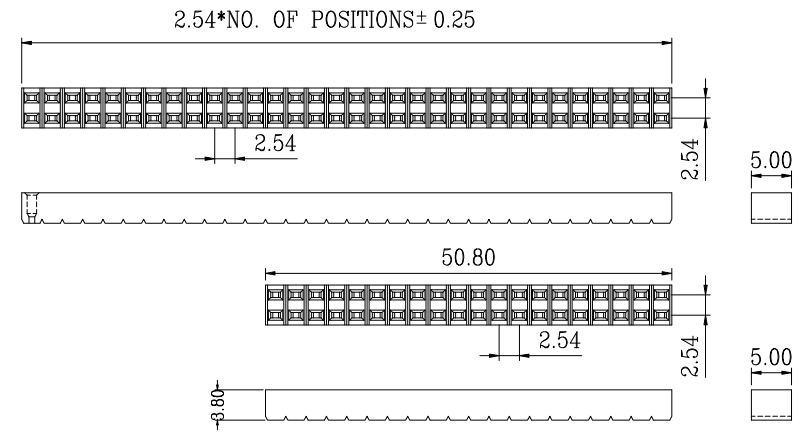



Recommend P.C.B. Layout  
 TOP View

RoHS Compliant


TOLERANCES ARE

  
**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
**煜倫股份有限公司**  
[www.morethanall.com](http://www.morethanall.com)

DRAWING BY CY		X. ± 0.50 .X ± 0.35 .XX ± 0.25 .XXX ± 0.05 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

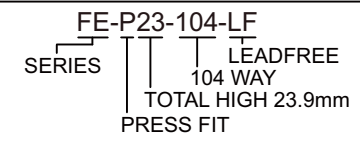

DESCRIPTION: