
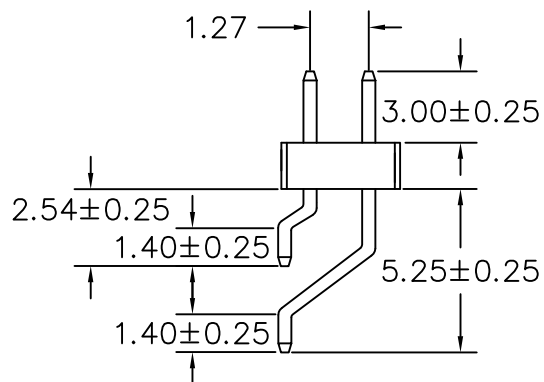


RECOMMENDED P.C.B LAYOUT

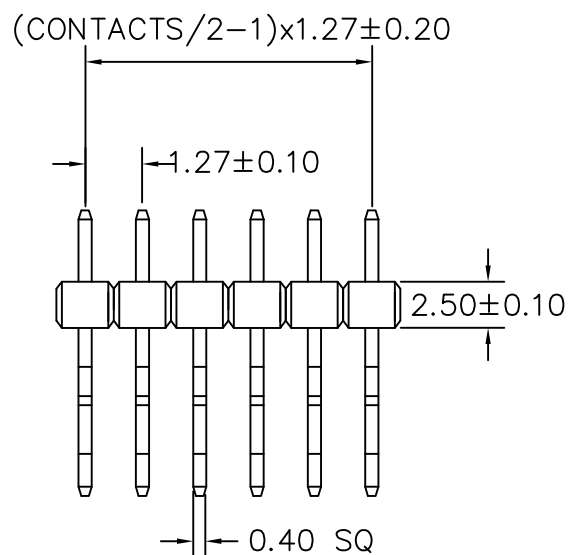

|          |      |
|----------|------|
| CONTACTS | 2X21 |
| 2X2      | 2X22 |
| 2X3      | 2X23 |
| 2X4      | 2X24 |
| 2X5      | 2X25 |
| 2X6      | 2X26 |
| 2X7      | 2X27 |
| 2X8      | 2X28 |
| 2X9      | 2X29 |
| 2X10     | 2X30 |
| 2X11     | 2X31 |
| 2X12     | 2X32 |
| 2X13     | 2X33 |
| 2X14     | 2X34 |
| 2X15     | 2X35 |
| 2X16     | 2X36 |
| 2X17     | 2X37 |
| 2X18     | 2X38 |
| 2X19     | 2X39 |
| 2X20     | 2X40 |

MATERIAL

HOUSING : NYLON 6T,UL94V-0  
 CONTACT : COPPER ALLOYS  
 PLATED : GOLD-FLASH  
 COLOR : BLACK

SPECIFICATION

CURRENT : 1A  
 OPERATING TEMPERATURE : -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : 500V AC MIN

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

P PROJECTION

X. ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ±  
 ANG ± 5°



ORDER INFORMATION

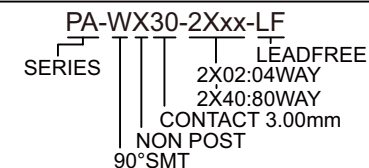

DESCRIPTION: