

Recommended P.C.Board
Layout
(Tolerance:±0.05)

Specifications

Current Rating:3Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic,UL 94V-0 Nylon 6T(Halogen Free)
or the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

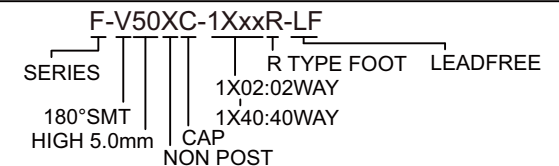

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE BASE 5.00H

www.morethanall.com