

P.C.B LAYOUT (TOP VIEW)


MATERIAL AND FINISH

HOUSING : LCP POLYESTER UL-94V-0 MIXED GLASS FIBER.
 STANDARD COLOR FIBER.
 CONTACT : 0.30mm THICK PHOSPHOR BRONZE PLATED WITH NICKEL.
 CONTACT PLATED : GOLD 3u".
 SHIELD : 0.20mm THICK COPPER ALLOY PLATED WITH NICKEL.

ELECTRICAL:
 1. CURRENT RATING : 1.5 AMP.
 2. VOLTAGE RATING : 150 VAC.
 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MILLIOHMS MIN.
 5. DIELECTRIC WITHSTANDING VOLTAGE : 1000 VAC, 1MIN.


RoHS Compliant

TOLERANCES ARE

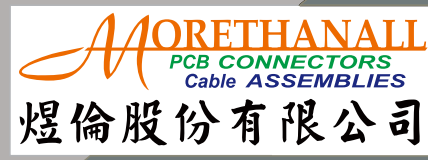

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

MJWF06A2-KX03MP-6288-LF

SERIES
 LEADFREE
 6P2C/8P8C
 METAL POST
 03u" GOLD
 NON EAR
 BLACK

DESCRIPTION: