


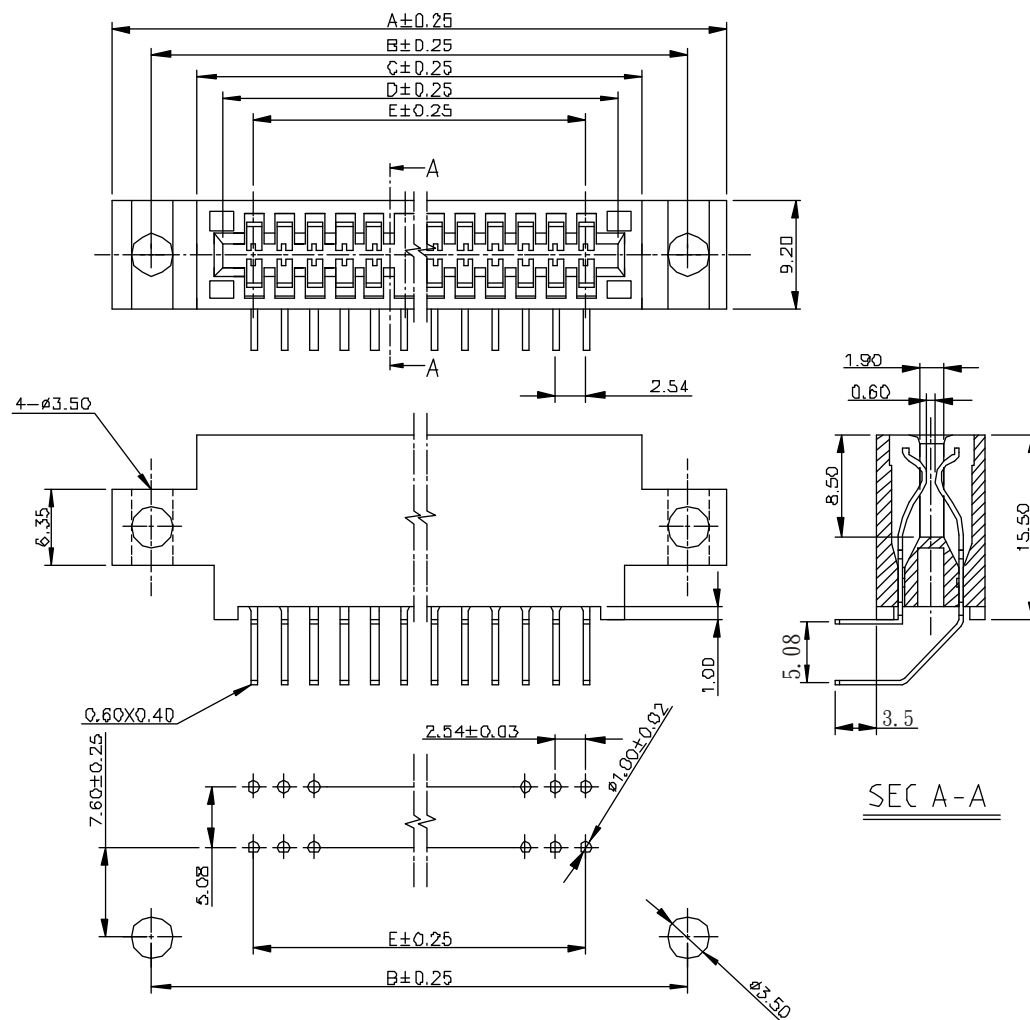

FEATURE:

INSULATOR

Glass-Filled P.B.T. is 94V-0 rated

CONTACT

Phosphor Bronze selective gold plating
over nickel

SPECIFICATION:

Current Rating . 3 amperes

Contact Resistance . 20 miniohms max

Operation Temperature -55°C to $+105^{\circ}\text{C}$

Voltage Rating . 800 VAC 1 minute

Insulation Resistance . 5000 megaohms min

Insertion Force . 412 grams max per pair

Withdrawal Force . 32 grams min. per pair

CONTACT NO	DIM A	DIM B	DIM C	DIM D	DIM E
12/24	51.69	45.09	37.38	33.22	27.94
22/44	77.09	70.49	62.78	58.62	53.34
24/48	82.17	75.57	67.86	63.70	58.42
25/50	84.71	78.11	70.40	66.24	60.96
28/56	92.33	85.73	78.02	73.86	68.58
30/60	97.41	90.81	83.11	78.94	73.66
35/70	110.11	103.51	95.80	91.64	86.36
36/72	112.65	116.05	98.34	94.18	88.91
43/86	131.43	123.83	116.12	111.96	106.68
44/88	133.17	126.57	118.66	114.50	109.22
50/100	148.21	141.61	133.90	129.74	124.46

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X $\pm$
X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

E-RME-xxx-LF
SERIES | LEADFREE
024~100WAY
MIDDLE EARS
DIP 90°

DESCRIPTION: EDGE CONNECTOR 2.54mm PITCH WITH MID-HIGH MOUNTING EARS R/A TYPE