



P.C.B. Layout

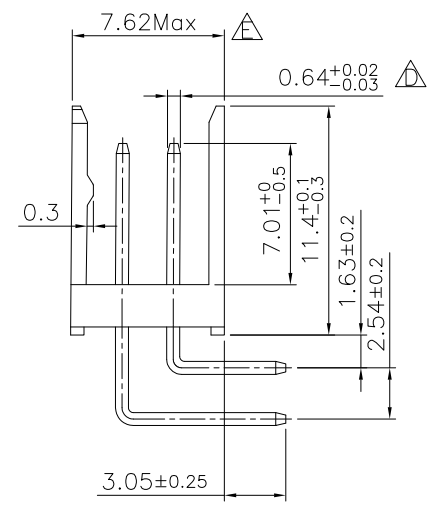

Specifications:
 Current Rating: 3.0A AC, DC
 Voltage Rating: 250V AC, DC
 Contact Resistance: 20mohm Max
 Insulation Resistance: 1000Mohm Min.
 Withstanding Voltage: 1000V AC/minute
 Operating Temperature Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Material And Finish:
 Insulator: High Temp Plastic (Nylon 66 UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Plating: Tin Plated



Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
04	2.54	5.08	24	27.94	30.48
06	5.08	7.62	26	30.48	33.02
08	7.62	10.16	28	33.02	35.56
10	10.16	12.70	30	35.56	38.10
12	12.70	15.24	32	38.10	40.64
14	15.24	17.78	34	40.64	43.18
16	17.78	20.32	36	43.18	45.72
18	20.32	22.86	38	45.72	48.26
20	22.86	25.40	40	48.26	50.80
22	25.40	27.94			


RoHS Compliant

TOLERANCES ARE



DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE

X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±



ORDER INFORMATION

HE14-RT-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X20:40WAY
 TIN PLATED
 DIP 90°

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: 2.54mm Wire to Board Wafer Double Row