


● **MATERIALS: (RoHS Compliant)**





Housing: Plastic Thermoplastic PA66 UL94V-0.Black
 Termination Cover: Plastic Thermoplastic PBT UL94V-0.Black
 Contacts: Phosphor Bronze Gold Selective Plated
 Shell: Steel, Nickel Plated Over Copper
 Boardlock: Brass, Tin Plated Over Copper
 Screws: Steel, Nickel Plated Over Copper

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 250V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C



Screw Nut*2

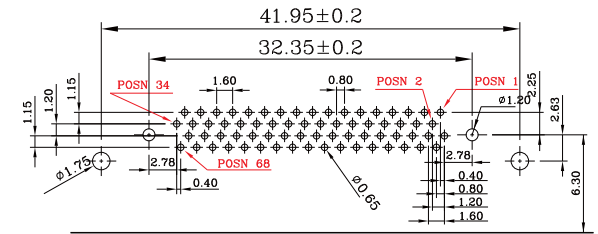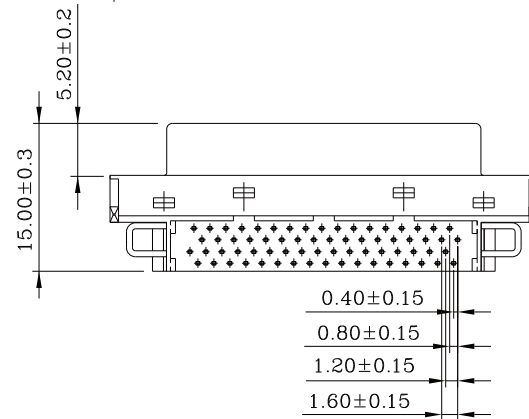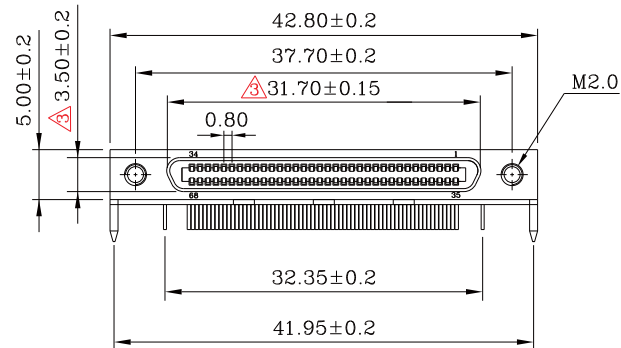

PCB EDGE

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

VHC-SRN22H-068-LF
 SERIES | | | | LEADFREE
 | | | | 68 WAY
 | | | | HEX SCREW
 FEMALE | CLIP
 | NUT
 | DIP 90°

DESCRIPTION: 0.8(.0315") (VHDCI) 68P Receptacles Headers Right-Angle Mount Type