

**MATERIAL**

Contact Pin : Brass





**SPECIFICATION**

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

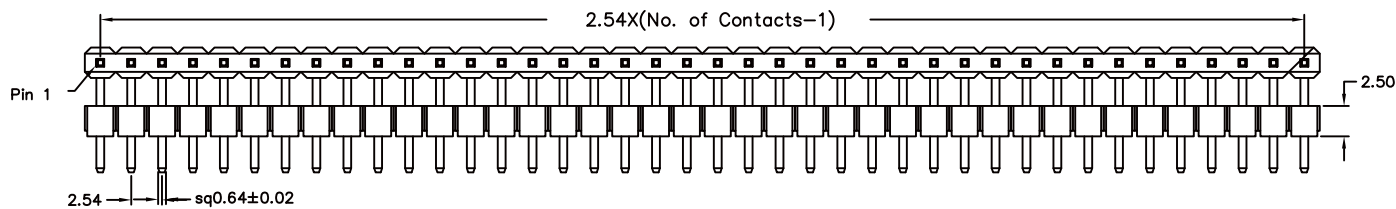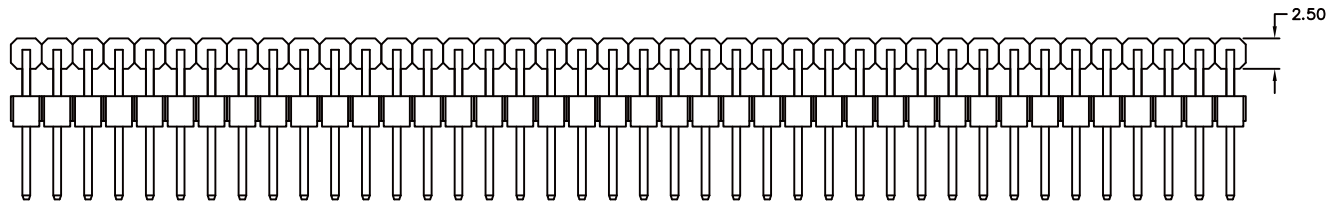

Recommended P.C.B Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



**ORDER INFORMATION**

**HSB-R60603060-1Xxx-LF**  
SERIES | LEADFREE  
1X02:02 WAY  
1X40:40 WAY  
90°SMT HIGH 6.0mm  
BASE 6.0mm | DIP 3.0mm  
CONTACT 6.0mm

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DESCRIPTION: PIN HEADER 2.54\*2.54mm RIGHT ANGLE TYPE, DUAL ROWS