


P1
USB A M


YS121462

包地線熱縮管上點白點

P2
S/T

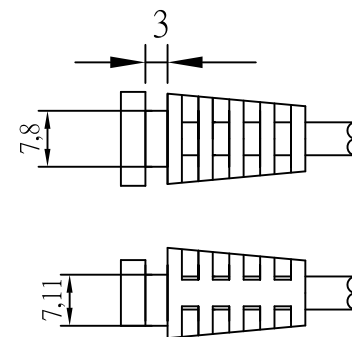

WIRING DIAGRAM

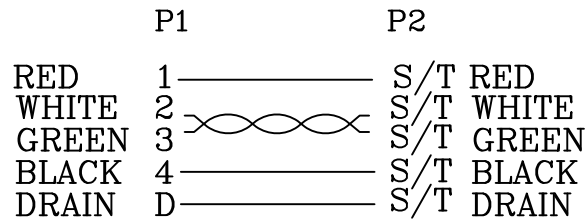

2	CONNECTOR	1	SET	USB A TYPE MALE G/F #WHITE
1	CABLE	2100	mm	UL2725 28AWG*1P(WHITE, GREEN)+24AWG*2C(RED, BLACK)+AEB OD:4.5±0.15mm #BLACK
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION



ORDER INFORMATION

UBX1-4A1X2428-Mxxx-LF

SERIES

4 PIN A TYPE

SR

MALE

24/28AWG

LEADFREE

2M08:2080mm

1M5:1500mm

DESCRIPTION: USB A MALE L:2.08M BLACK