




1.27×CONTACTS/2±0.35

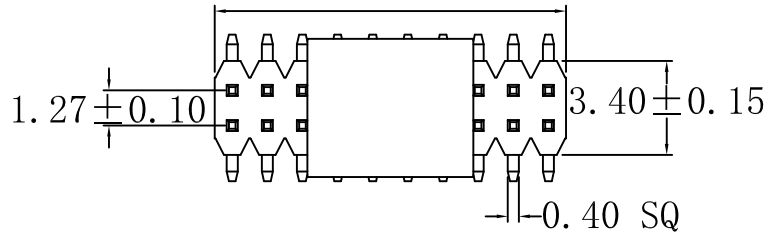

1.27×(CONTACTS/2-1)±0.20

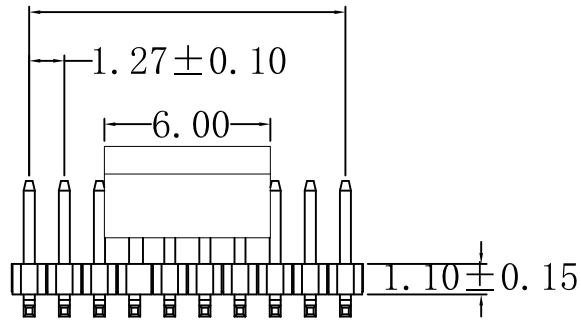

1.27×(CONTACTS/2-1)

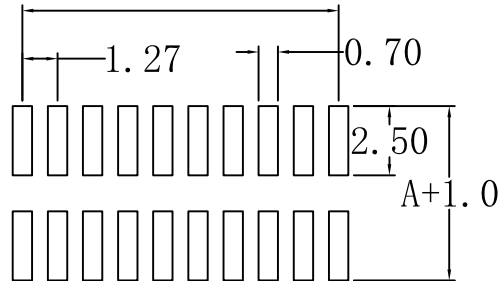


P. C. B . LAYOUT

MATERIAL

HOUSING :NY6T, UL-94V0
 CONTACT :COPPER ALLOYS
 PLATED :GOLD-FLASH
 COLOR :BLACK

SPECIFICATION

CURRENT : 1A
 OPERATING TEMPERAURE : -55° C TO +105° C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 300 V AC MIN



A: 5.50mm
 B: 3.00mm
 C: 1.60mm

CONTACTS

2×02	2×27
2×03	2×28
2×04	2×29
2×05	2×30
2×06	2×31
2×07	2×32
2×08	2×33
2×09	2×34
2×10	2×35
2×11	2×36
2×12	2×37
2×13	2×38
2×14	2×39
2×15	2×40
2×16	2×41
2×17	2×42
2×18	2×43
2×19	2×44
2×20	2×45
2×21	2×46
2×22	2×47
2×23	2×48
2×24	2×49
2×25	2×50
2×26	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1:1

DATE

SIZE A4

X.±
 .X±0.38
 .XX±0.25
 .XXX±
 ANG±5°

PJECTION



ORDER INFORMATION

PA-V16X30C-2Xxx-LF
 SERIES | | | | | LEADFREE
 | | | | | 2X02:04 WAY
 | | | | | 2X50:100 WAY
 180°SMT | | | | | CAP
 HIGH 1.6mm | | | | | CONTACT 3.0mm
 NON POST

DESCRIPTION: PIN HEADER 1.27PH SMT+CAP

煜倫股份有限公司

www.morethanall.com