


Recommended P.C.Board
Layout
(Tolerance:±0.05)

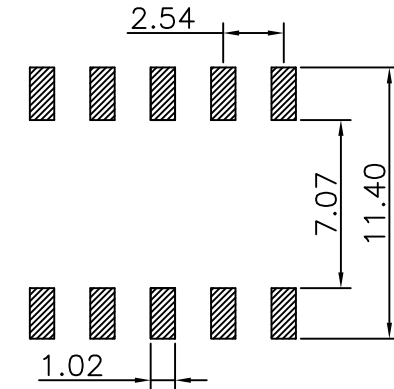

Specifications

Current Rating:3Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon(無鹵)or
the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

P PROJECTION



ORDER INFORMATION

F-MX-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X40:40WAY
NON POST
SIDE ENTRY SMT

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE SIDE ENTRY