
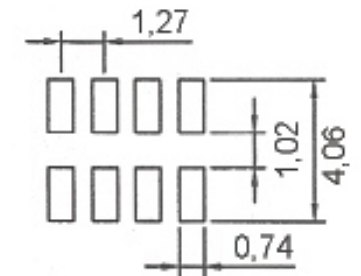
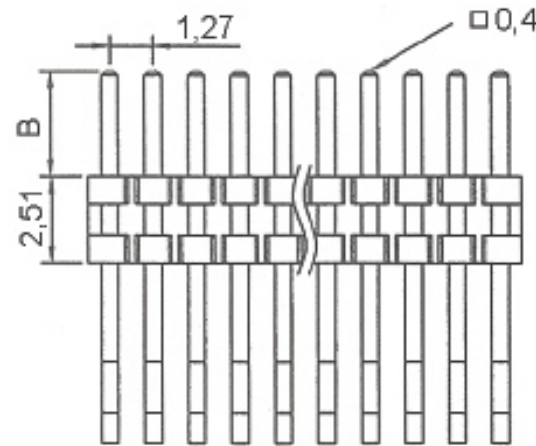
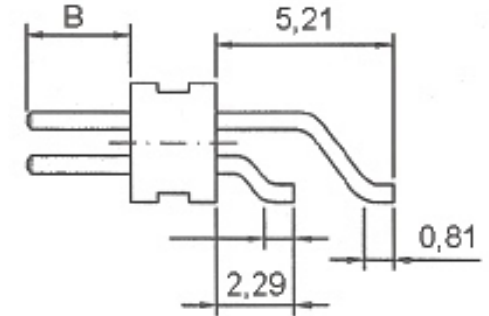


Technische Daten / Technical Data

Isolierkörper <i>Insulator</i>	Nylon 6T, UL94V0 <i>Nylon 6T, UL94V0</i>
Kontaktmaterial <i>Contact Material</i>	Phosphorbronze <i>Phosphorbronze</i>
Nennstrom <i>Current Rating</i>	1 A
Nennspannung <i>Voltage Rating</i>	500 V _{AC}
Durchgangswiderstand <i>Contact Resistance</i>	max. 20 mOhm
Isolationswiderstand <i>Insulation Resistance</i>	5000 MOhm
Temperaturbereich <i>Temperature Range</i>	-40°C ... +105°C

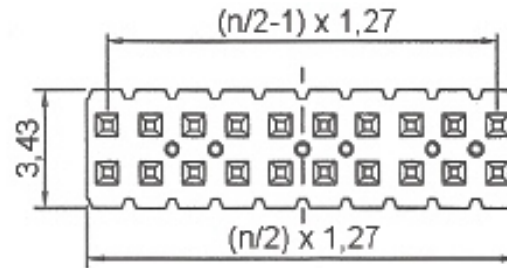

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PA-WXxx-2Xxx-LF
SERIES | B | LEADFREE
90°SMT | 2X02:04WAY | 30:3.0mm
NON POST | 2X50:100WAY | 90:9.0mm

DESCRIPTION: