
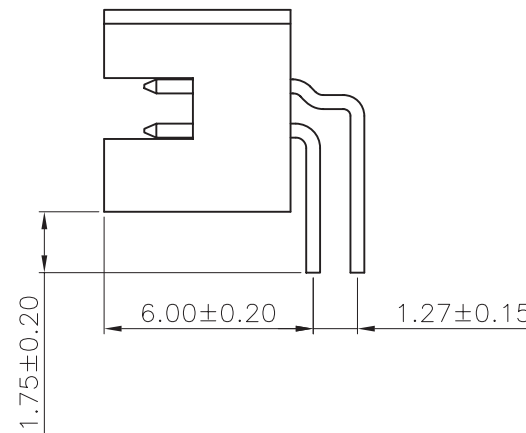


### Specifications


Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T(Processing temp.260°C,10sec)

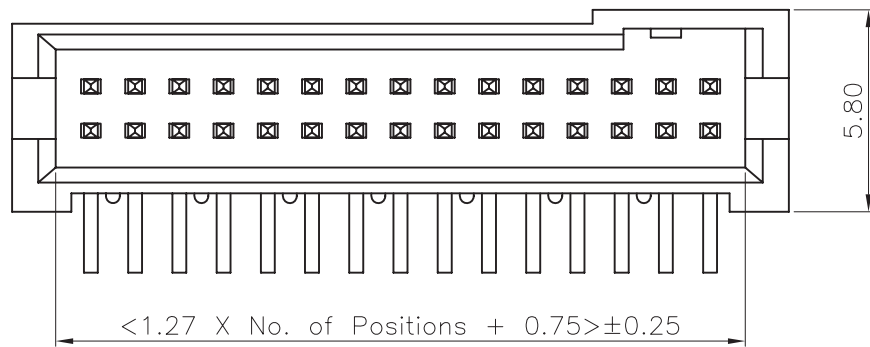

Recommended P.C.Board  
 Hole Layout  
 (Tolerance: ±0.05)

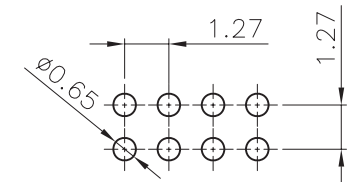

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION

照片框

### ORDER INFORMATION

PAB-R-2Xxx-LF

SERIES

DIP 90°

2X05:10WAY  
 2X50:100WAY

LEADFREE

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS R/A TYPE