
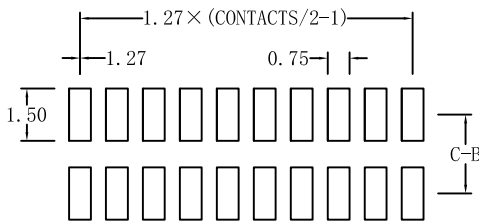
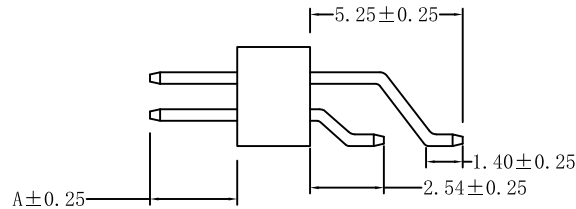


**MATERIAL**  
 HOUSING : NY6T, UL-94V0  
 COLOR : BLACK  
 CONTACT : BRASS  
 PLATED : GOLD-FLASH

**SPECIFICATION**  
 CURRENT : 1A  
 OPERATING TEMPERAURE : -55° C TO +105° C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN  
 WITHSTAND VOLTAGE : 500 V AC/minute

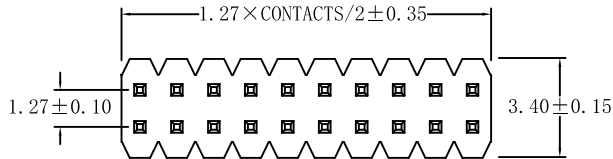

P. C. B . LAYOUT

A: 2.30 mm

CONTACTS			
	2×12	2×25	2×38
	2×13	2×26	2×39
	2×14	2×27	2×40
2×02	2×15	2×28	2×41
2×03	2×16	2×29	2×42
2×04	2×17	2×30	2×43
2×05	2×18	2×31	2×44
2×06	2×19	2×32	2×45
2×07	2×20	2×33	2×46
2×08	2×21	2×34	2×47
2×09	2×22	2×35	2×48
2×10	2×23	2×36	2×49
2×11	2×24	2×37	2×50

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ±  
 ANG ± 5°



**ORDER INFORMATION**

PA-WX23-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04WAY  
 2X50:100WAY  
 CONTACT 2.30mm  
 NON POST  
 90°SMT

DESCRIPTION: 1.27PH HORIZONTAL SMT H:2.50 2\*XXPIN