
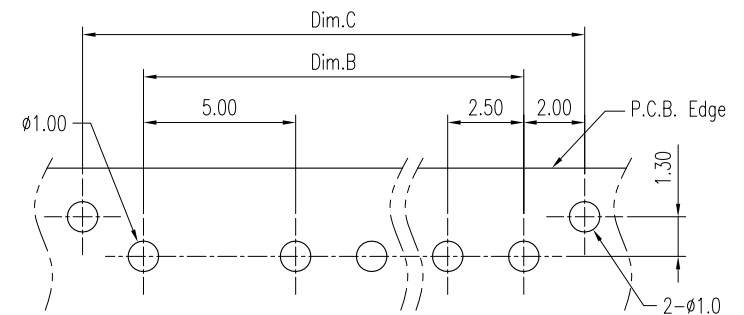


Notes:

- Material:
Housing: Thermoplastic UL 94V-0, Black
Terminal: Copper Alloy
- Finish:
Terminal: Selected Gold on Contact Area,
Gold Flash on Solder Tails, Both over
50u" Nickel Under-plated Overall

Dimension Information:

Amount of Pins	Dim.A	Dim.B	Dim.C
3	14.50	7.50	11.50
4	17.00	10.00	14.00
5	19.50	12.50	16.50
6	22.00	15.00	19.00
7	24.50	17.50	21.50
8	27.00	20.00	24.00
9	29.50	22.50	26.50
10	32.00	25.00	29.00
12	37.00	30.00	34.00

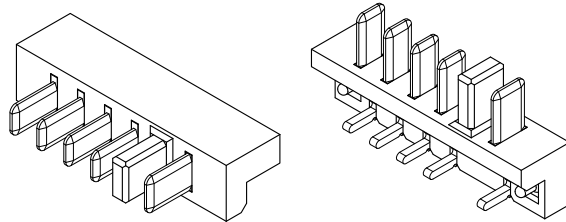

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05mm

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PJECTION



ORDER INFORMATION

BCC25-PR23R2P-xx-LF

SERIES | | | | | LEADFREE
03~12 WAY
POST
RIGHT 2
HIGH 2.3mm
DIP 90°
MALE

DESCRIPTION: 2.5mm Pitch Battery Conn. Male Type