





SEC.A-A



SEC.B-B

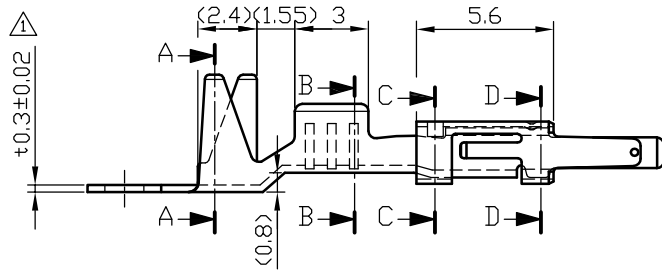

SEC.C-C



SEC.D-D

說明:

- 1.預鍍錫膜厚40u"以上
- 2.對手件: TAB=0.6
插入力: 0.4KG以下
拉拔力: 0.1KG以上
10回拉拔力: 0.1KG以上

⚠ 3.產品淨重: 約 0.4g

NOTE:

- 1.Pre-Tin Plated Thickness More Than 40u"
- 2.Mating Part: TAB=0.6
Inserted Force: Less Than 0.4KG
Tensile Force: More Than 0.1KG
The Ten Time Tensile Force: More Than 0.1KG

⚠ 3.Net Weight of the Product: about 0.4g

1	Q060T-FT-18	Body: Phosphor Bronze Spring: Stainless	Note 1	0.5~0.85mm ²
NO.	產品編號 Part Number	材料 Material	表面處理 Surface Treatment	線徑 Wire Range

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

Q060TT-FT-18-LF

SERIES | LEADFREE
18 AWG
TERMINAL
FEMALE

DESCRIPTION: