


Material

- Item ① Terminal cover : Thermoplastic (UL94V-0)
- Item ② Terminal body : Thermoplastic (UL94V-0)
- Item ③ Terminal screw :Steel , Zinc plating "+/-" slot type
- Item ④ Wire guard solder pin : Brass, Tin plated
- Item ⑤ Clamp : Steel stamping, Zinc plating

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: US

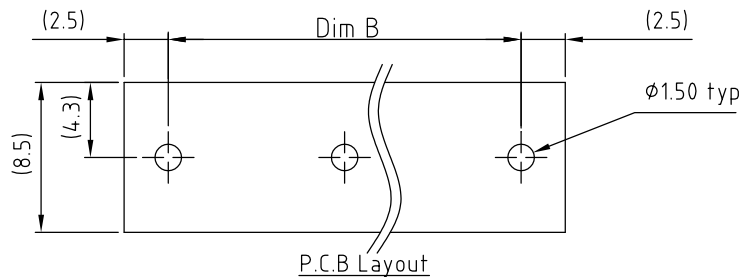

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	15.00	25.00	35.00	45.00	55.00	65.00	75.00	85.00	95.00	105.0	115.0	
Dim B	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.0	110.0	
TOL	±0.15		±0.25			±0.30			±0.40			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1


.XXX±

DATE

ANG±

SIZE A4

P PROJECTION



ORDER INFORMATION

TBHH100-D15SX-xx-LF

SERIES

LEADFREE

02~12WAY

SCREW "+" TYPE

HIGH 15.6mm

DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: