



Specifications:  
 Current rating:1.0A AC,DC  
 Voltage rating:30V AC, DC  
 Contact resistance:20m ohm. Max.  
 Insulation resistance:1000M ohm. Min.  
 Withstanding voltage:AC 500V AC/minute  
 Operating temperature range:-40°C ~ +105°C  
 Materials:  
 Insulator:High Temp. Plastic (UL94V-0)  
 Contact material:Phosphor Bronze  
 Finish:Tin Plated

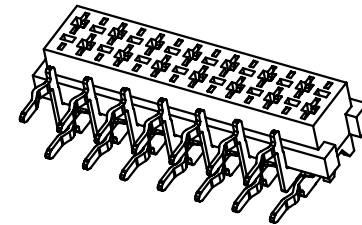

Pos	A	B	C	Pos	A	B	C
4	7.00	3.81	5.60	16	22.24	19.05	20.84
6	9.54	6.35	8.14	18	24.78	21.59	23.38
8	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54

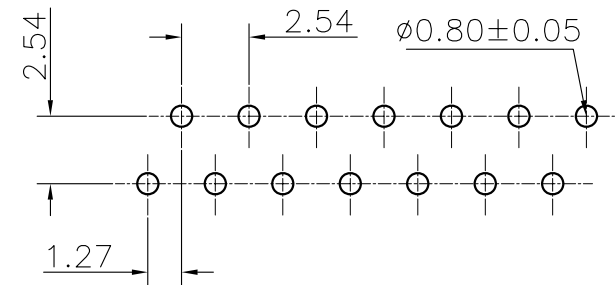

PCB Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.20  
 .XX ± 0.10  
 .XXX ±  
 ANG ±

PJECTION



ORDER INFORMATION

MIM-SR-xx-LF  
 SERIES | LEADFREE  
 04-26WAY  
 DIP 90°  
 FEMALE

DESCRIPTION: 2.54mm PCB Connector 90° Type

煜倫股份有限公司

www.morethanall.com