

RECOMMENDED PCB LAYOUT
TOP VIEW
PCB THICKNESS: 1.60±0.05mm
TOLERANCE: ±0.05mm

Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:


Housing: High-Thermoplastic UL94V-0

Contact : Selective Gold Plating

Terminal: 0.25mm Thickness Copper Alloy

Plated With Gold And Tin In Solder Area.

Shell: Alloy ,Nickel Plating

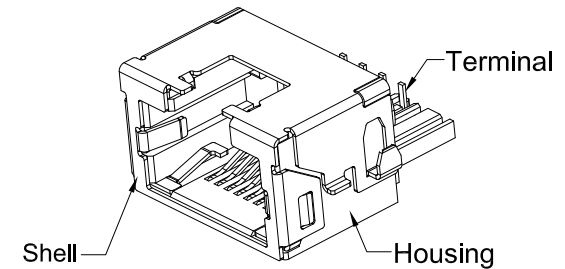

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ±



ORDER INFORMATION

MJF04-KX01EM2-0808-LF

SERIES | LEADFREE
| 8P8C
| METAL FOOT
| EAR
BLACK | G/F | NON EAR

DESCRIPTION: RJ45,Shielded,Receptacle, Horizontal,Single Port,Tht

煜倫股份有限公司

www.morethanall.com