


MATING CONDITION

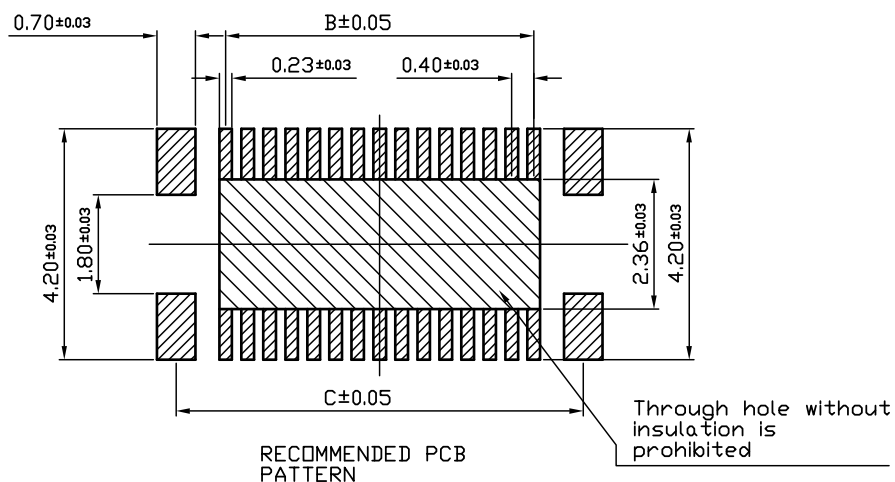

- NOTES:
- MATERIAL:
    - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0(LCP); COLOR:BLACK.
    - CONTACT: PHOSPHOR BRONZE(C5210)
    - FITTING NAIL: PHOSPHOR BRONZE(C5191)
  - FINISH:
    - CONTACT:SEE ORDER INFORMATION.
    - UNDERPLATING: 50~100μ' NICKEL OVERALL.
  - REFLOW SOLDER CAPABLE TO 260°C

DIM	A	B	C
20Pin	6.75	3.60	5.40
24Pin	7.55	4.40	6.20
30Pin	8.75	5.60	7.40
40Pin	10.75	7.60	9.40

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.10  
ANG ± 2°

PJECTION



ORDER INFORMATION

NP0418-S09X-xxx-LF

SERIES | | | LEADFREE  
| | | 020-040WAY  
| | | NON POST  
| | | UNMATED HIGH 0.9mm  
| | | FEMALE

DESCRIPTION: