

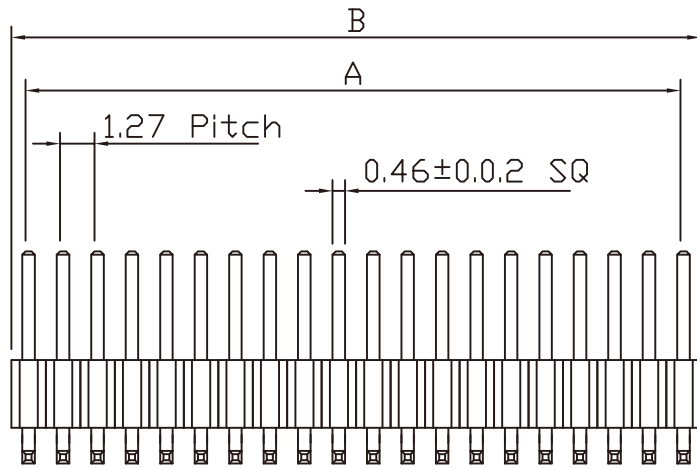


Conteract:  
 Contact:Brass.  
 Insuiator:Nylon 6T.  
 Finish:Gold flash plated over nickel.

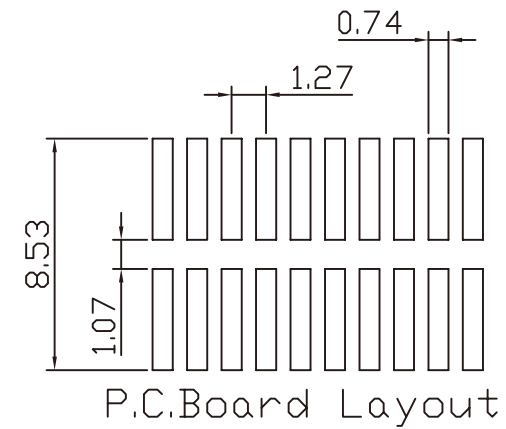

$A = 1.27 \times (\text{NO of Spaces} - 1)$   
 $B = A + 1.27 \pm 0.3$

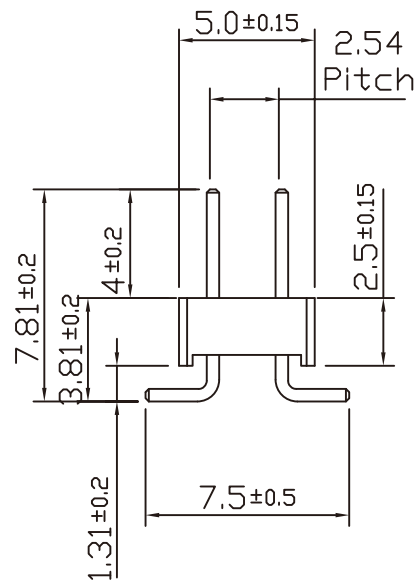

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±



**ORDER INFORMATION**

**P-V38X40-2Xxx-LF**  
 SERIES | LEADFREE  
 2X02:04WAY  
 2X50:100WAY  
 CONTACT 4.0mm  
 180°SMT | NON POST  
 HIGH 3.81mm

DESCRIPTION: 1.27X2.54 PIN HEADER SMT DUAL ROW

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)