


凸點防呆，與標示P1的面相反



Specifications

Current Rating: 0.8Amp @ 70°C ambient for 80PIN

Insulation Resistance: 10000M Ω Min.

Dielectric Withstanding Voltage: 500V AC

Contact Resistance: 25mΩ Max.

Operating Temperature: -55°C to +125°C

Materials

Contact Material: COPPER ALLOY

Insulator Material: High Temperature Thermoplastic,


△ UL 94V-0 LCP or the equivalent material.

Colour: BLACK

Recommended P.C.Board

Layout

(Tolerance: ±0.05)

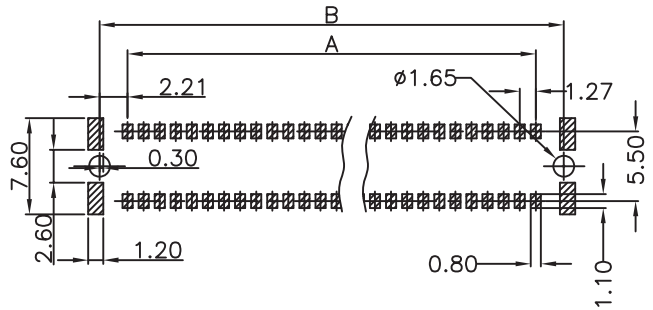

PIN NO.	A	B	C	D	E
12	6.35	10.77	12.70	9.37	8.37
26	15.24	19.66	21.59	18.26	17.26
50	30.48	34.90	36.83	33.50	32.50
68	41.91	46.33	48.26	44.93	43.93
80	49.53	53.95	55.88	52.55	51.55

RoHS Compliant



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30


.X ± 0.25

.XX ± 0.15

.XXX ± 0.10


ANG ±

P PROJECTION



ORDER INFORMATION

HAUB-SV62P-xxx-LF

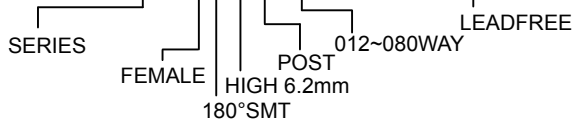

DESCRIPTION: Pitch1.27 Female Connector SMC TYPE-B SMT TYPE HIGH6.20mm 180°