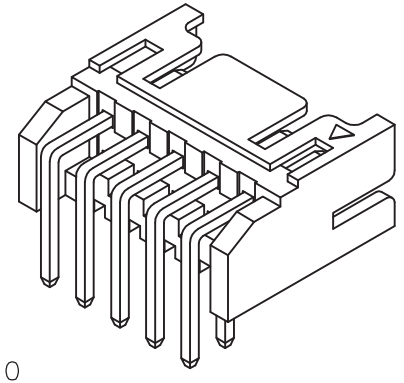

SPECIFICATIONS
Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: −25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin−plated
Material: Nylon 66,UL94V−0
Color: Black

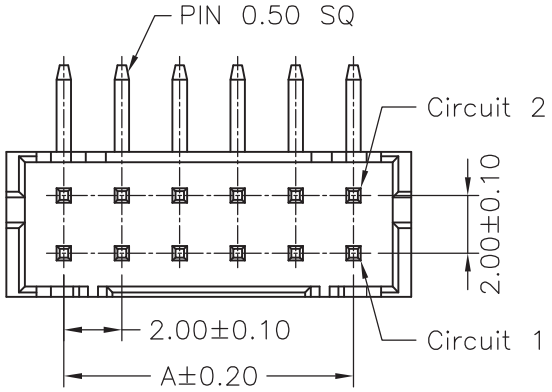





P.C.B LAYOUT

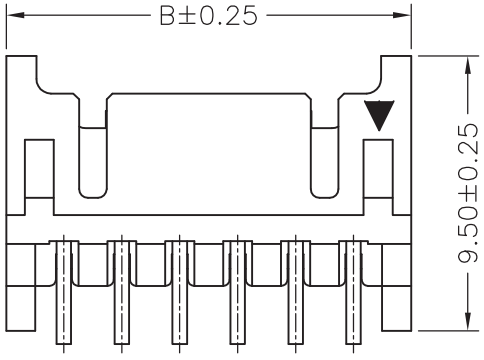


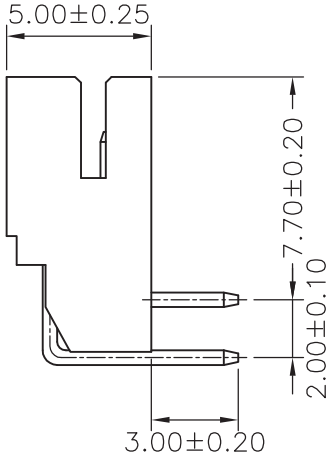


Ordering Information & Dimensions

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| DF11-R-2X02 | 2.00 | 6.00 |
| DF11-R-2X03 | 4.00 | 8.00 |
| DF11-R-2X04 | 6.00 | 10.00 |
| DF11-R-2X05 | 8.00 | 12.00 |
| DF11-R-2X06 | 10.00 | 14.00 |
| DF11-R-2X07 | 12.00 | 16.00 |
| DF11-R-2X08 | 14.00 | 18.00 |
| DF11-R-2X09 | 16.00 | 20.00 |
| DF11-R-2X10 | 18.00 | 22.00 |
| DF11-R-2X11 | 20.00 | 24.00 |
| DF11-R-2X12 | 22.00 | 26.00 |
| DF11-R-2X13 | 24.00 | 28.00 |
| DF11-R-2X14 | 26.00 | 30.00 |
| DF11-R-2X15 | 28.00 | 32.00 |
| DF11-R-2X16 | 30.00 | 34.00 |
| DF11-R-2X17 | 32.00 | 36.00 |
| DF11-R-2X18 | 34.00 | 38.00 |
| DF11-R-2X19 | 36.00 | 40.00 |
| DF11-R-2X20 | 38.00 | 42.00 |

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

| | | |
|---|---|---|
| DRAWING BY CY | | TOLERANCES ARE |
| CHECKED BY GENIUS | | X. ± |
| UNIT / mm | SCALE 1 : 1 | .X ± |
| | | .XX ± |
| | | .XXX ± |
| DATE | | ANG ± |
| SIZE A4 | PPOJECTION | |



ORDER INFORMATION

DF11-R-2Xxx-LF
SERIES
LEADFREE
2X02:04WAY
2X20:40WAY
DIP 90°

DESCRIPTION: 2.00mm PITCH 90° WAFER