

Notes:

- \*Material
  - Housing: LCP, UL 94V-0 rated;
  - Color: Black.
  - Contact: Phosphor Bronze
  - Plating: Gold Plating over Nickel on contact area
  - Tin plating on solder Tail.

- \*Mechanical
  - Insertion Force: 45N max.
  - Withdrawal Force: 10N min.
  - Durability: 500 cycles

- \*Electrical Specification
  - Operation Voltage: 100 VAC max.
  - Current Rating: 1.5 Ampere per contact
  - Contact Resistance: 30 Milliohms max.
  - Insulation Resistance: 1000 Megohms min.
  - Dielectric Withstanding Voltage: 500 VAC

- \*Environmental
  - Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

- X, ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

PPOJECTION



ORDER INFORMATION

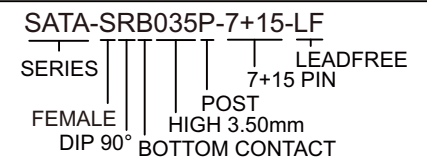

DESCRIPTION: S ATA 7+15P 90° DIP Female (8.0)