

Material and Finish:

1. Insulator Material: L.C.P.+30% Glass Filled, UI94v-0, Color: Black
2. CAM Housing Material: Nylon-9T+30% Glass Filled, UI94-0, Color: Black
3. Contact Material: Phosphor Bronze, C5191R-EH, t=0.15mm
4. Switch Terminal Material: Phosphor Bronze, C5191R-EH, t=0.15mm
5. Contact Area Plated: 15u" Gold Plated Over 50u" Nickel
6. Solder Area Plated: 100u" Tin Plated Over 50u" Nickel
7. Switch Terminal Contact Area Plated: 2u" Gold Plated Over 50u" Nickel
8. Switch Terminal Solder Area Plated: 100u" Tin Plated Over 50u" Nickel
9. Wire Spring: SUS304-WPB, Nickel Plated
10. Shell Material: Stainless Steel Sull 301, t=0.2mm
11. Shell Solder Area Plated: 2u" Selective Gold Plated For One Side
12. CAM Pin: SUS304-WPB, Nickel Plated
13. Current Rating: 0.5A AC/DC Max
14. Contact Resistance: 30 mohm Max
15. Insulation Resistance: 500 Mohm Min
16. Dielectric Withstanding Voltage: 250V AC/DC
17. Insertion cycles: 5000 Cycles Min
18. Operation Temperature: -55°C to +85°C
19. Card Detection Switch (NORMAL OPEN)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



P PROJECTION



ORDER INFORMATION

SCP-W14PBA25-06-LF
SERIES | | | | | LEADFREE
| | | | | 06WAY
| | | | | EAR/POST 2.5mm
| | | | | B TYPE
| | | | | PUSH PUSH
| | | | | POST TO POST 14.0mm

DESCRIPTION:

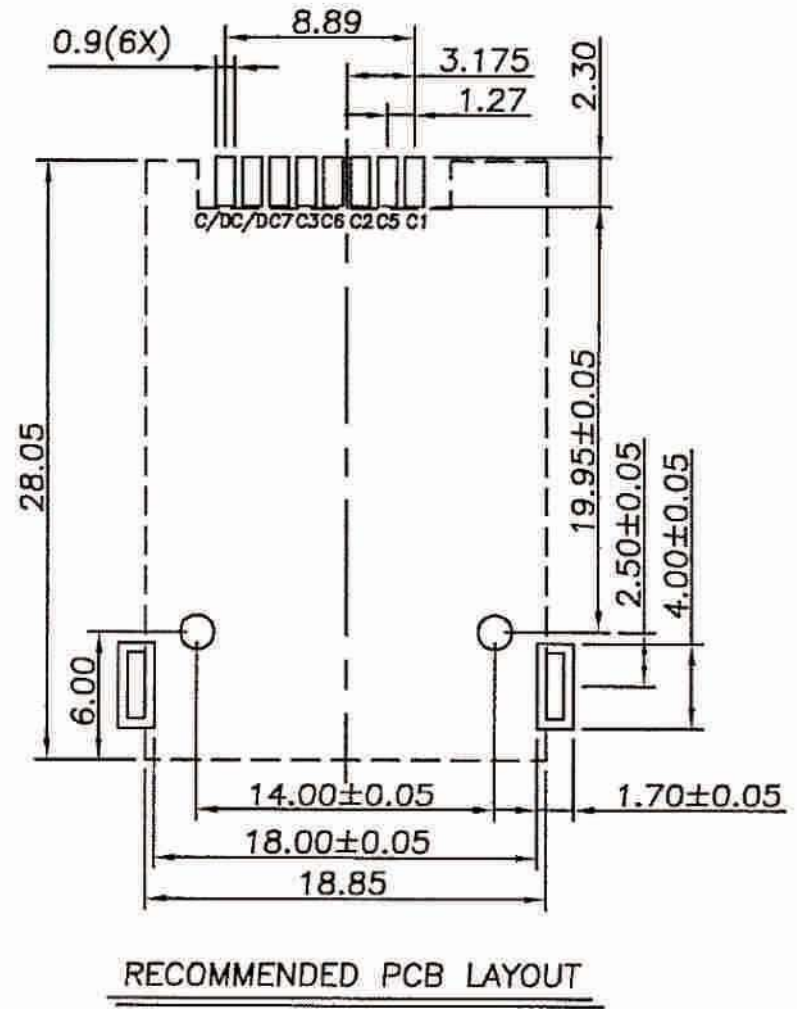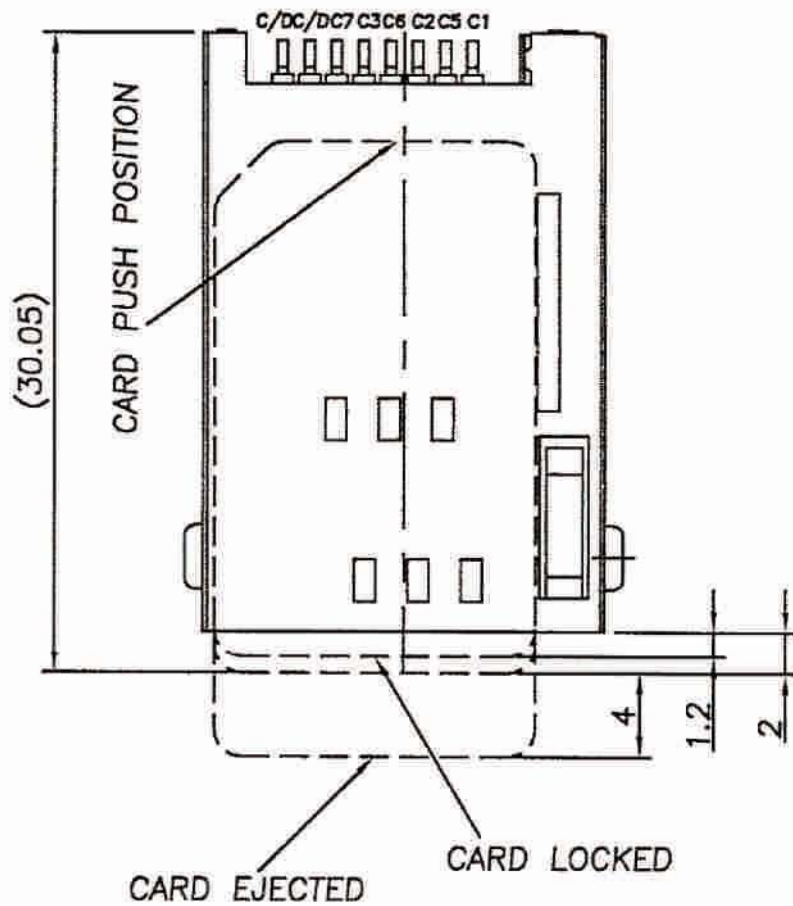

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±


.X±

.XX±

.XXX±

ANG±

P PROJECTION



ORDER INFORMATION

SCP-W14PBA25-06-LF

SERIES | | | | | | LEADFREE
| | | | | | 06WAY
| | | | | | EAR/POST 2.5mm
| | | | | | B TYPE
| | | | | | PUSH PUSH
| | | | | | POST TO POST 14.0mm

DESCRIPTION: