

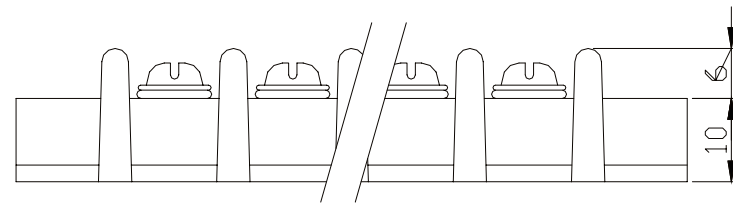


SPECIFICATIONS

BARRIER MATERIAL : PHENOLIC BLACK
 SCREW: NICKEL PLATED STEEL #8#32
 WIRING : 10-18 STR.
 RATING : 40 AMPERE 5.600 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000V
 INSULATION RESISTANCE 500M OR MORE AT DC 500V

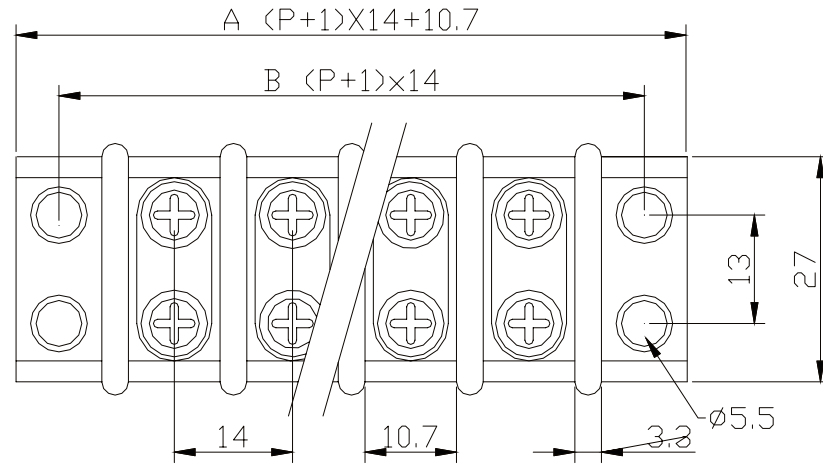

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	52.7	66.7	80.7	94.7	108.7	122.7	136.7	150.7	164.7	178.7	192.7	206.7	220.7	234.7
B	42	56	70	84	98	112	126	140	154	168	182	196	210	224
POLE	16	17	18	19	20	21	22	23	24					
A	248.7	262.7	276.7	290.7	304.7	318.7	332.7	346.7	360.7					
B	238	252	266	280	294	308	322	336	350					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

TBA140-W-xx-LF

SERIES

LEADFREE

02-24WAY

WIRE TO WIRE

DESCRIPTION: