


NOTE:  
 MATERIAL:  
 HOUSING:PA66 UL94 BLACK  
 CONTACT:C2680  
 PLATING:  
 CONTACT: GOLD PLATING  
 SPECIFICATION:  
 VOLTAGE RATING: 50V  
 CURRENT RATING: 1.1A  
 CONTACT RESISTANCE TERMINAL:20mΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC  
 INSULATION RESISTANCE:1000MΩ MIN

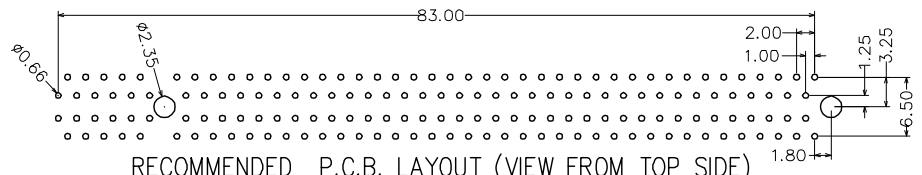

RECOMMENDED P.C.B. LAYOUT (VIEW FROM TOP SIDE)

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

X. ±  
 .X ± 0.30  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±

PJECTION



ORDER INFORMATION

PCIX-DLF-164-LF  
 SERIES | LEADFREE  
 164WAY  
 FLAGE LOCK  
 DIP 180°

DESCRIPTION: PCI 1.0 164P滑扣式成品