


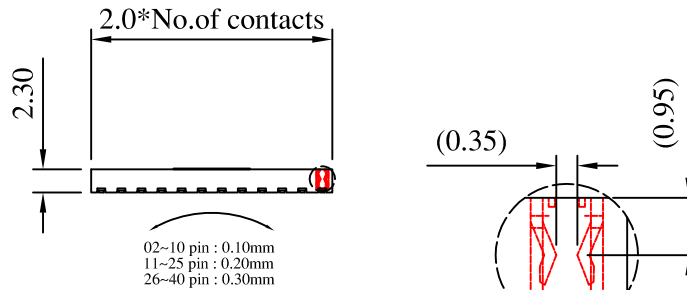
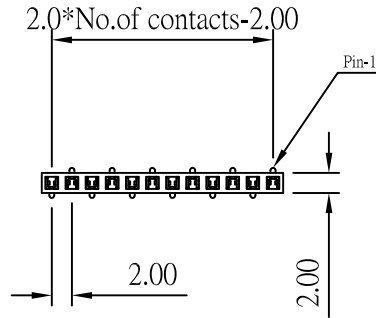


Current Rating and voltage: 2 Amps 250V(r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Plastic,UL 94V-0  
 Finish: Standard: Gold Flash all over



Recommended P.C. Board SMD Layout

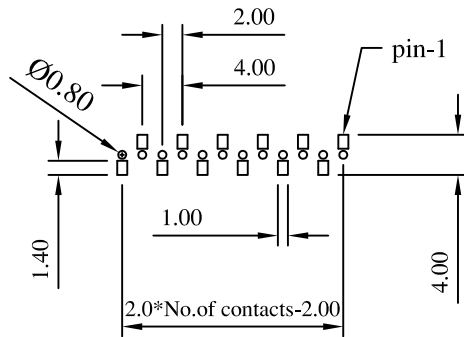

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±



ORDER INFORMATION

S-Z23X-1XxxL-LF  
 SERIES | L TYPE | LEADFREE  
 | | | L TYPE  
 | | | 1X02:02 WAY  
 | | | 1X40:40 WAY  
 BOTTOM ENTRY SMT | NON POST  
 | HIGH 2.3mm

DESCRIPTION: