


Specification:  
 Current Rating:3A.  
 Withstanding Voltage:500V AC(1min).  
 Insulation Resistance:5000MΩ minimum.  
 Contact Resistance:20MΩ maximum.  
 Operating Temperature:-40°C to +85°C.

Material:  
 Contact:Brass.  
 Insulator:Nylon 9T.  
 Finish:Gold flash plated over nickel.

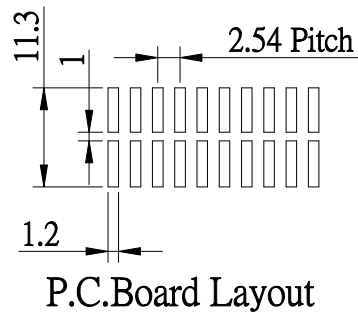

Circuits	Dimension			
	A	B	C	D
10	32.00	10.16	21.84	18.20
14	34.08	15.24	26.92	23.28
16	39.62	17.78	29.46	25.82
20	44.70	22.86	34.54	30.90
24	49.78	27.94	39.62	35.98
26	52.32	30.48	47.28	43.60
30	57.40	35.56	35.56	35.56
34	62.48	40.64	52.32	48.68
40	70.10	48.26	59.94	56.30
50	82.80	60.96	72.64	69.00

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±

PJECTION



ORDER INFORMATION

L-VS-xx-LF  
 SERIES | LEADFREE  
 | 10-50 WAY  
 | SHORT LATCH  
 | 180°SMT

DESCRIPTION: