


Circuits	Dimension	
	A	B
10	5.08	9.34
12	6.35	10.61
14	7.62	11.88
16	8.89	13.15
20	11.43	15.69
24	13.97	18.23
26	15.24	19.50
30	17.78	22.04
34	20.32	24.58
40	24.13	28.39
44	26.67	30.93
50	30.48	34.74
60	36.83	41.09
64	39.37	43.63
66	40.64	44.90
68	41.91	46.17
80	49.53	53.79
100	62.23	66.49

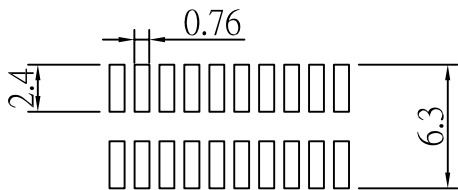

P.C.Board Layout

Contact:
 Contact:Brass.
 Insulator:Nylon6T.
 Finish:Gold flash plated over nickel.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

PAB-V16X-2Xxx-LF

SERIES LEADFREE
 2X03:06WAY
 2X50:100WAY
 180°SMT NON POST
 1.6mm HIGH

DESCRIPTION: 1.27-1.27 Pitch Box Header SMT Type